

ശാസ്ത്രവിഭാഗം I  
Physics I

E<sub>02</sub>

01 | S | I

ഓരോ രേഖകൾ  
Two hours

Instructions:

- \* This question paper has 10 pages and 50 questions.
- \* Answer all 50 questions.
- \* Calculators are not allowed. ( $g = 10 \text{ Nkg}^{-1}$ )


Name : .....




01. SI unit of the electrified intensity is

- 1. wb
- 2.  $\text{Am}^{-1}$
- 3.  $\text{Nm}^{-1}$
- 4.  $\text{NC}^{-1} \text{m}^2$
- 5. T


02. The variation of electrostatic force (F) between two charges with their Separation (r) is best shown by




(1)




(2)



(3)



(4)



(5)


03. A circular part of diameter R is removed from a circular disc of radius R as shown in the diagram. The distance to the center of gravity of the remaining part from O is



- 1.  $\frac{R}{8}$
- 2.  $\frac{R}{6}$
- 3.  $\frac{R}{4}$
- 4.  $\frac{R}{2}$
- 5. R



04. The variation of tensile force ( $F$ ) acting on a rubber strip with extension ( $e$ ) is shown from the graph,



Consider following statements,

- (A) The rubber strip has regained the initial length.
- (B) Some energy is converted to heat.
- (C) Total strain energy is lost when it regains the initial length.

of the statements,

1. Only A is true.
2. Only B is true.
3. Only C is true.
4. Only B and C are true.
5. Only A and B are true.

05. Pressure of an ideal gas becomes 4 times under constant volume. Then root mean square velocity of gas molecules,

1. remains unchanged
2. becomes doubled
3. becomes 4 times
4. becomes half
5. becomes 16 times

06. When a metal A of mass 0.1kg at  $62^{\circ}\text{C}$  is dropped into a liquid B of mass 0.3kg at  $20^{\circ}\text{C}$ . Maximum temperature the liquid reaches is  $26^{\circ}\text{C}$ . Metal A of mass 0.2kg at  $70^{\circ}\text{C}$  is dropped in to the liquid B of mass 0.5kg at  $22^{\circ}\text{C}$ , then the maximum temperature the liquid reaches is, (neglect the heat lost and the heat capacity of the vessel)

- |                         |                         |                         |
|-------------------------|-------------------------|-------------------------|
| 1. $30^{\circ}\text{C}$ | 2. $34^{\circ}\text{C}$ | 3. $38^{\circ}\text{C}$ |
| 4. $46^{\circ}\text{C}$ | 5. $52^{\circ}\text{C}$ |                         |

07. Three energy levels of electrons of a certain LASER gas are as follows,

$(-) 20 \times 10^{-22} \text{KJ}$ ,  $(-) 5 \times 10^{-22} \text{KJ}$  and  $(-) 1 \times 10^{-22} \text{KJ}$ .


Frequency of the LASER photons produced from this gas is, ( $h = 6 \times 10^{-34} \text{Js}$ .)

- |                                   |                                   |                                   |
|-----------------------------------|-----------------------------------|-----------------------------------|
| 1. $2.5 \times 10^{15} \text{Hz}$ | 2. $3.3 \times 10^{13} \text{Hz}$ | 3. $2.5 \times 10^{12} \text{Hz}$ |
| 4. $3.3 \times 10^{12} \text{Hz}$ | 5. $2.5 \times 10^{18} \text{Hz}$ |                                   |

08. A motor cycle engine produces a certain intensity level. How many motor cycle should operate to change the intensity level by 10dB.

- |       |       |       |
|-------|-------|-------|
| 1. 2  | 2. 5  | 3. 10 |
| 4. 20 | 5. 10 |       |


09. Refraction of a light ray from three glass prisms is shown in diagrams below.  $A$  is the prism angle and  $C$  is the critical angle of glass.

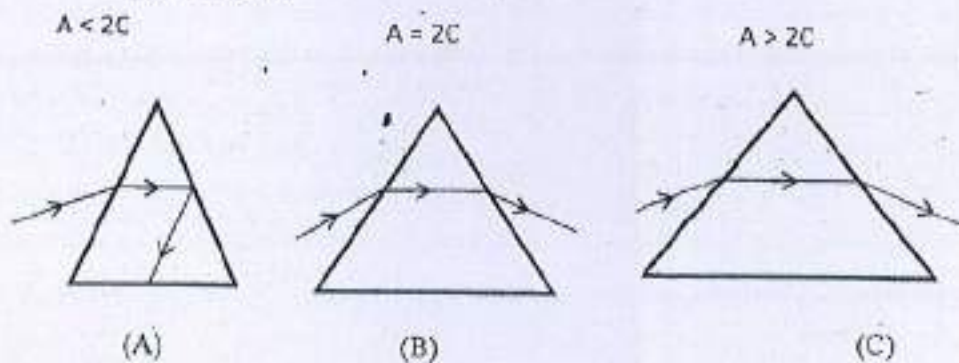

Of the diagrams

- |                             |                           |
|-----------------------------|---------------------------|
| (1) Only A is true          | (2) Only B is true        |
| (3) Only A and B are true   | (4) Only A and C are true |
| (5) All A, B and C are true |                           |

10. Two large insulating parallel plates carry charge of equal magnitude, one positive and the other negative, that is distributed uniformly over their inner surfaces.



Rank the points 1 through 5 according to the magnitude of the electric field at the points, least to greatest.

- (1) 1, 2, 3, 4, 5
  - (2) 5, 4, 3, 2, 1
  - (3) 1, 4, and 5 tie, then 2 and 3 tie
  - (4) 2 and 3 tie, then 1 and 4 tie, then 5
  - (5) 2 and 3 tie, then 1, 4, and 5 tie
11. The electric flux passing through a hemi spherical surface of radius  $R$  placed in an electric field  $E$  with its axis parallel to the field is,

- |                 |                 |
|-----------------|-----------------|
| 1) $\pi R^2 E$  | 2) $2\pi R^2 E$ |
| 3) $\pi R E$    | 4) $3\pi R^2 E$ |
| 5) $2\pi R^2 E$ |                 |

12. Which of the following statements is NOT true about transformers?

- (1) Transfer Electrical power from one electrical circuit to another Electrical circuit
- (2) It's working without changing the frequency
- (3) Work through on electric induction.
- (4) When, both circuits take effect of mutual induction
- (5) Efficiency depends upon the frequency

13. Current of  $0.75\text{A}$  when a battery of  $1.5\text{V}$  is connected to wire of  $5\text{m}$  having cross sectional area  $2.5 \times 10^{-7}\text{m}^2$  will have resistivity

- |  |  |                                      |
|--|--|--------------------------------------|
| (1) $1 \times 10^{-7}\Omega\text{m}$   | (2) $1.1 \times 10^{-7}\Omega\text{m}$ | (3) $2 \times 10^{-7}\Omega\text{m}$ |
| (4) $2.1 \times 10^{-7}\Omega\text{m}$ | (5) $2.5 \times 10^{-7}\Omega\text{m}$ |                                      |



14. 5 g of water rises in the bore of capillary tube when it is dipped in water. If the radius of bore capillary tube is doubled, the mass of water that rises in the capillary tube above the outside water level is

- (1) 1.5 g (2) 10 g (3) 5 g  
 (4) 15g (5) 4 g

15. A radioactive sample is tested using a Geiger tube with a thin end window. When a piece of paper is placed between the source and the tube, there is no fall in the count rate. When the piece of paper is replaced by a thick sheet of aluminium, the count rate falls significantly, but remains well above the background level. What type of radiation does this sample emit?

- (1) Alpha and Beta (2) Alpha and Gamma  
 (3) Beta and Gamma (4) Beta  
 (5) Gamma

16. When photons with an energy of 4 eV are incident on a surface, the ejected electrons have energies up to 1.1 eV. What energy photons are required to eject electrons with an energy of up to 10 eV?


- (1) 4 eV (2) 12.9 eV  
 (3) 14 eV (4) 15.1 eV  
 (5) 10 eV

17. Consider the following statements.

- (A)  $\alpha$  and  $\beta$  particles have (+) and (-) charge respectively.  
 (B) The penetration power of  $\beta$  is more than  $\alpha$ .  
 (C) The neutrino is the antiparticle of the  $\beta$  particle.

1. Only (A) is true. 2. Only (B) is true.  
 3. Only (A) and (B) are true. 4. Only (A) and (C) are true.  
 5. all are true

18. An object of mass 8 kg starting from rest gains the velocity  $V_1$  after 6s and  $V_2$  after 10 s. The variation of the force acting on the object with time is shown in the graph. The magnitudes of  $V_1$  and  $V_2$  are respectively



1.  $10\text{ms}^{-1}, 12\text{ms}^{-1}$  2.  $15\text{ms}^{-1}, 0$  3.  $20\text{ms}^{-1}, 0$   
 4.  $15\text{ms}^{-1}, 20\text{ms}^{-1}$  5.  $20\text{ms}^{-1}, 15\text{ms}^{-1}$

19. A body initially at rest exploded in to two parts of masses  $2m$  and  $3m$  respectively having a total kinetic energy  $E$ . The kinetic energy of mass  $2m$  after the explosion is,

1.  $\frac{E}{3}$  2.  $\frac{E}{5}$  3.  $\frac{2E}{5}$   
 4.  $\frac{3E}{5}$  5.  $\frac{4E}{5}$

20. A string is connected to a bucket having water of mass  $m$ . Then the bucket is whirled in a vertical circle with velocity  $V$  from the other end. The radius of the circle is  $r$ . The water does not leave the bucket when it is vertically above the center, then

1.  $mg = \frac{mv^2}{r}$
2.  $mg \geq \frac{mv^2}{r}$
3.  $mg \leq \frac{mv^2}{r}$
4. The tension  $T = \frac{mv^2}{r}$
5.  $T + mg = \frac{mv^2}{r}$

21. Two oscillating particles having same amplitude are in same phase. Consider the following statements.

- (a) Their displacement is same at any movement.
- (b) Their potential energy is maximum at every movement.
- (c) Their total mechanical energy is constant and their magnitude is same.


Of the statement

1. Only (a) is true.
  2. Only (a) and (b) are true.
  3. Only (b) and (c) are true.
  4. Only (c) is true.
  5. Only (b) and (c) are true.
22. A beam of light converging to a point 10cm behind a converging lens is incident on the lens. Find the position of the point image if the lens has a focal length of 40cm.
1. 13.3 cm in front of the lens
  2. 10 cm in front of the lens
  3. 5 cm behind the lens
  4. 8 cm behind the lens
  5. At infinity
23. A light ray incident on one side of a prism emerges from the opposite side. The incident angle and the angle of emergence are  $36^\circ 28'$  and  $50^\circ 12'$  respectively. The prism angle is  $60^\circ$ . The angle of deviation is,
1.  $13^\circ 32'$
  2.  $26^\circ 32'$
  3.  $56^\circ 32'$
  4.  $43^\circ 16'$
  5.  $54^\circ 2'$



32. The current through the idea ammeter shown in the circuit is,


1. 5A
2. 4A
3. 3A
4. 2A
5. 1A

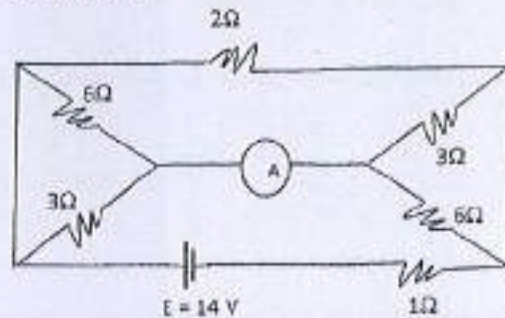

33. The temperature resistance coefficient of the filament of a bulb is  $5 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$ . The resistance of the filament at  $100^\circ\text{C}$  is  $100\Omega$ . The resistance of the bulb becomes  $200\Omega$  at temperature,

1.  $500^\circ\text{C}$
2.  $200^\circ\text{C}$
3.  $300^\circ\text{C}$
4.  $400^\circ\text{C}$
5.  $100^\circ\text{C}$

34. The current gain of the Si transistor shown in the circuit is 100. The emitter - base voltage of the transistor is  $0.7\text{V}$ . The voltage between the collector - emitter terminals is,

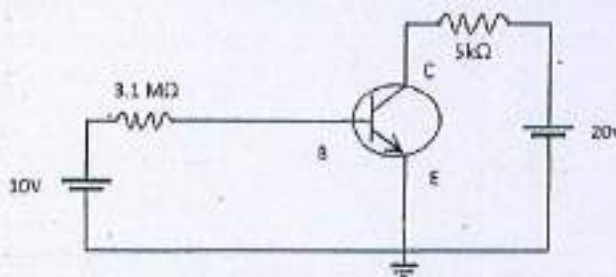


- (1) 18.5 v
- (2) 20v
- (3) 5v
- (4) 15v
- (5) 30v

35. False statement regarding an ideal operational amplifier is,

1. Voltage gain is infinity.
2. Current gain is infinity.
3. Output resistance is infinity.
4. Input resistance is infinity.
5. Frequency rang is infinity.

36. The correct truth table for the given circuit is,

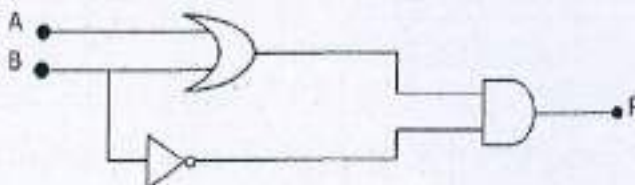

A	B	F
0	0	0
0	1	1
1	0	0
1	1	0

(1)

A	B	F
0	0	0
0	1	0
1	0	0
1	1	1

(2)

A	B	F
0	0	0
0	1	1
1	0	1
1	1	0

(3)


A	B	F
0	0	0
0	1	0
1	0	0
1	1	0

(4)

A	B	F
0	0	0
0	1	0
1	0	1
1	1	0

(5)


37.



The diagram shows an arrangement to find the speed of air flowing through a pipe. One end of a U tube filled with water is held near the opening of the tube. Then the water level difference in the tube is 9cm. The density of the air is  $2\text{kgm}^{-3}$ . The speed of the flow is,


1.  $30\text{ms}^{-1}$
2.  $40\text{ms}^{-1}$
3.  $50\text{ms}^{-1}$
4.  $60\text{ms}^{-1}$
5.  $70\text{ms}^{-1}$

38.

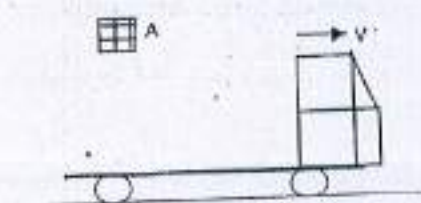

A truck having smooth floor board moves horizontally with uniform velocity. An object is dropped from certain height so that it hits the floor board.

The velocity - time graph for the object is best shown by,

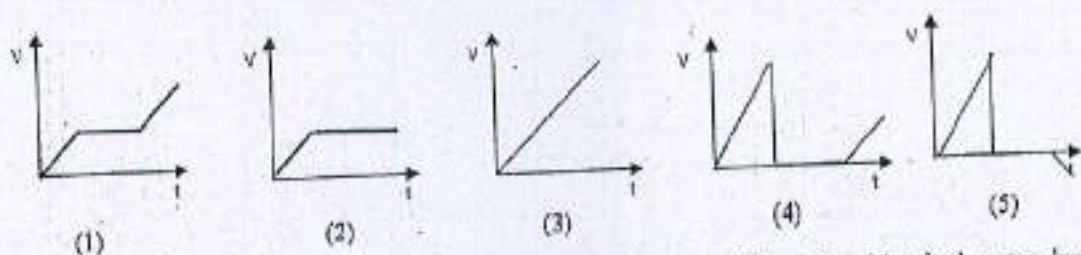

39. A water drop is falling in air with terminal velocity. It combines with another identical water drop and make a large drop. Upthrust from air is negligible. The ratio of the terminal velocity of large drop and small drop is,


1. 4
2.  $2^{2/3}$
3.  $4^{2/3}$
4. 2
5.  $1/2$

40. On a day where the room temperature was  $27^{\circ}\text{C}$ , the relative humidity in a closed room was 60%. When the room temperature reduced to  $17^{\circ}\text{C}$  the room had become saturated and some water vapour had condensed. Saturated water vapour pressure at  $27^{\circ}\text{C}$  and  $17^{\circ}\text{C}$  are  $27\text{mmHg}$  and  $14.5\text{mmHg}$ . The fraction of the water vapor condensed is,

1.  $\frac{1}{27}$
2.  $\frac{12}{27}$
3.  $\frac{25}{27}$
4.  $\frac{25}{54}$
5.  $\frac{3}{5}$



41.

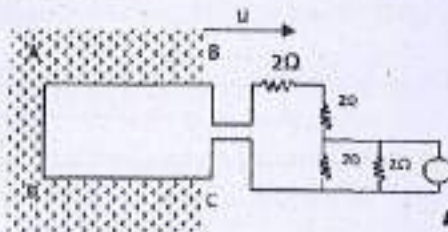


1.  $0.5 \text{ ms}^{-1}$   
4.  $100 \text{ ms}^{-1}$

2.  $10 \text{ ms}^{-1}$   
5.  $150 \text{ ms}^{-1}$

3.  $50 \text{ ms}^{-1}$ 

A square shape wire frame ABCD of sides 10cm is moved across a magnetic field with velocity  $V$  as shown in the diagram. The flux density is  $2 \text{ Wbm}^{-2}$ . The voltmeter shown in the circuit is an ideal one and its reading is 6V. The value of  $V$  is,

42.

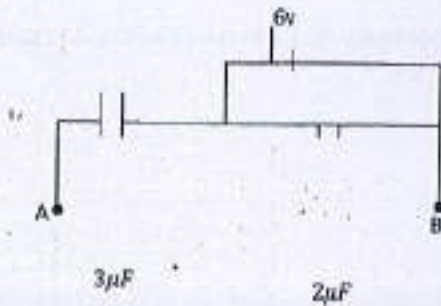




1.  $0 \mu\text{J}$   
4.  $360 \mu\text{J}$

2.  $36 \mu\text{J}$   
5.  $600 \mu\text{J}$

3.  $240 \mu\text{J}$ 

A battery of *emf* 10 V and negligible internal resistance is connected across A and B of the capacitor circuit shown in the diagram. Then the terminals of the battery are interchanged and connected across A and B. The energy change in capacitor is,

43. Three conducting wire are bent in different ways as shown in the diagram. They carry equal current. The magnetic flux densities at the centers are  $B_1$ ,  $B_2$  and  $B_3$  respectively. Which correctly shows them in ascending order?



1.  $B_1 > B_2 > B_3$   
4.  $B_2 > B_3 > B_1$

2.  $B_1 > B_3 > B_2$   
5.  $B_2 > B_1 > B_3$

3.  $B_2 > B_2 > B_1$ 

44. The length of two wires A and B are equal. The diameter of A is 3 times that of B. Young's modulus of A is half that of B. Their ends are joined together and make a composite wire. An object is hung from one end of the composite wire and the other end is fixed to a support. The ratio,  $\frac{\text{extension of A}}{\text{extension of B}}$

1. 1:3  
4. 9:2

2. 2:3  
5. 1:1

3. 2:9

45. The excess pressure inside a soap bubble (X) is twice the excess pressure inside a second soap bubble (Y). The volume of the bubble (X) is  $N$  times the volume of the bubble (Y) value of  $N$  is,

1. 4  
4. 0.125


2. 0.5  
5. 0.625

3. 0.25

46. An insect of mass  $m$  is moving along the rim of a horizontal disc of radius  $R$  with constant speed  $v$  in anti-clock wise direction. The disc has moment of inertia  $I$  about its own axis about which is rotating with angular velocity  $\omega$  in clock wise direction. If the insect suddenly stops, what is the angular velocity of the disc?

1.  $I\omega$                       2.  $\frac{I\omega + mvR}{I + mR^2}$                       3.  $\frac{I\omega - mvR}{I + mR^2}$   
 4.  $\frac{I\omega - mvR}{I}$                       5.  $\frac{I\omega + mvR}{I}$

47. Choose the correct graph to represent the relationship between the tension ( $T$ ) in a string of given length and the frequency ( $f$ ) of the fundamental note emitted,

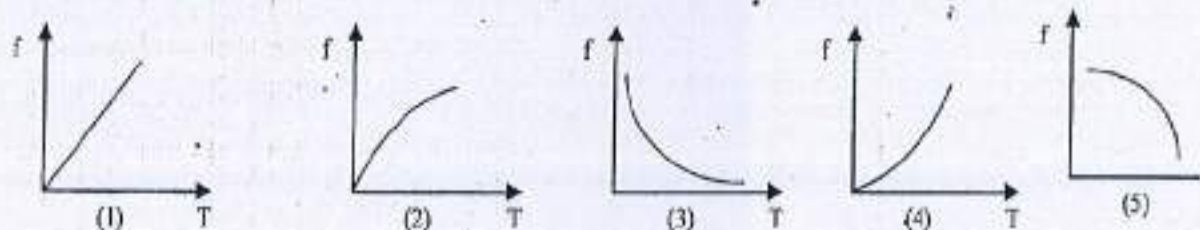


48. A potentiometer wire of length 100 cm has a resistance of  $10 \Omega$  and is connected in series with a resistance ( $R$ ) and a cell of *e.m.f.* of 2 V and negligible internal resistance. A source of *e.m.f.* 12 mV is balanced against a length of 48 cm of the potentiometer wire. What is the value of the resistance ( $R$ ),

1.  $800 \Omega$                       2.  $790 \Omega$                       3.  $780 \Omega$   
 4.  $760 \Omega$                       5.  $690 \Omega$

49. When the temperature of an ideal gas is increased by 600 K, the velocity of the sound in the gas become  $\sqrt{3}$  times the initial velocity in it. The initial temperature of the gas is,

1.  $-73^\circ \text{C}$                       2.  $27^\circ \text{C}$                       3.  $127^\circ \text{C}$   
 4.  $227^\circ \text{C}$                       5.  $327^\circ \text{C}$

50. In the figure is shown a circuit consisting of a battery and five unknown resistors. When an ideal ammeter is connected between the terminals A & B, its reading is 4A and when a resistance  $3\Omega$  is connected in series with the ammeter its reading becomes 2A. Now the ammeter and the  $3\Omega$  resistance are disconnected and ideal voltmeter is connected between the terminals A & B. What would be the voltmeter read?

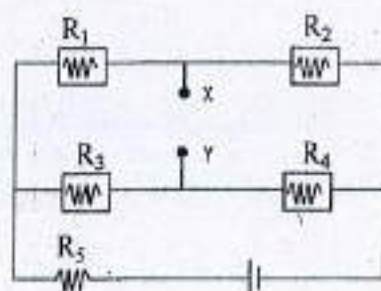

1. 6 V                      2. 10 V                      3. 12 V                      4. 14 V                      5. 18 V

**Final Term Test - June 2016**  
**Grade 13**

භෞතික විද්‍යාව II  
Physics II

E<sub>02</sub>

01 | S | II

පැය තුනයි  
Three hours

Name/Class .....

**Instructions :** \*This question paper consists of 10 questions in 15 pages  
\*This question paper comprises part A and part B. The time allocated for both parts is three hours

**PART A - Structured Essay (pages 2-7)**

- \*Answer all four questions on this paper itself
- \*Write your answer in the space provided for each question. Note that the space provided is sufficient for your answer and extensive answer are not expected.

**PART B - Essay (Page 7 - 15)**

- \*Answer four questions only. Use paper supplied for this purpose. At the end of the time allocated for this paper, tie the two together so that part A is on the top of part B before handing over the supervisor.
- \*You are permitted to remove only part B of the question paper from the examination hall.

**For Examiner's Use Only**

Part	Q. No	Marks
A	1	
	2	
	3	
	4	
B	5	
	6	
	7	
	8	
	9	
	10	
<b>Total</b>		
<b>Percentage</b>		

**Final Marks**

In numbers	
In words	

**Code Numbers**

Examiner	
Checked by	1.
	2.
Supervised by	



**Part A – Structured essay**

- Answer all 4 questions.

01) The diagram show a student sitting on a table rotating about the vertical axis through its center. The rotation speed is displayed on a computer screen. Initially she is stretching arms forward as shown in the diagram. Then the moment of inertia of the table with the student is  $4.1 \text{ kgm}^2$  and the speed of the table is  $2.7 \text{ rad s}^{-1}$

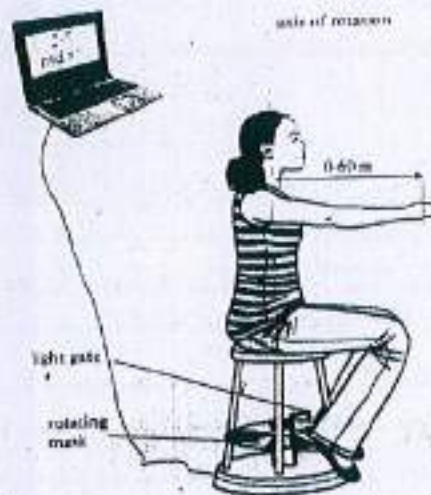


Figure 1

(a) Find the angular momentum of the table with the student.

.....

.....

.....

(b) Define the angular momentum of a particle in two ways.

.....

.....

.....

(c) The student while rotating picked an object of mass  $2.5 \text{ kg}$  at her hand level as shown in the diagram.

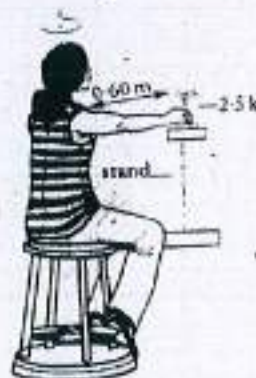


Figure 2

(i) Find the angular velocity of the system after that.

.....

.....

.....

(ii) Write down the principle applied for the above calculation.

.....

.....

.....

(iii). Now the student folds her arms closing the object towards her body. Explain what happen to the speed of the system giving reasons

.....  
.....  
.....

(iv). While rotating as in par (c) suddenly the object falls from her hand. What is the angular velocity of the reaming system in the subsequent motion?

.....  
.....

(d) In another experiment using the same set up the table with the student is rotating with angular velocity  $1.5 \text{ rads}^{-1}$ . Now she put down her one leg to touch the ground. Due to the frictional torque from the ground, the table comes to rest in  $0.75\text{s}$ . The moment of inertia of the system is  $4.5\text{kgm}^2$  calculate.



Figure 3


(a) The angular retardation?

.....  
.....  
.....

(b) Frictional torque?

.....  
.....  
.....

02)



(a) Why is the sonometer is made of hollow wooden box with holes?

.....  
.....

(b) In most sonometer euperiments resonance length is obtained for the fundamental vibration. Explain the reason for this?

.....  
.....



- (c) A tuning fork of frequency 500Hz is vibrated and kept on the sonometer box. When the length of the wire is 20cm it resonates with the tuning fork. Explain how the resonance state is obtained by using a paper rider.

.....  
 .....  
 .....

- (d) The tension in the wire described in part (c) is 20N. Calculate the linear density of the wire.

.....  
 .....  
 .....


- (e) The volume of the 20N load hung from the sonometer wire is  $12 \times 10^{-4} \text{ m}^3$ . When this load is fully submerged in a liquid, the corresponding resonance length is 15cm. Find the density of the liquid.

.....  
 .....  
 .....  
 .....

- (f) Now the load is taken out from the liquid and kept in air. Then vibrating part of the wire increased to 80cm by adjusting the bridges. When the wire is plucked from the middle and vibrated together with a tuning fork of frequency 508Hz, beats are produced. Find the beat frequency.

.....  
 .....  
 .....  
 .....

- 03) The diagram shows an experimental set up to study the variation of saturated vapour pressure of water with the temperature.

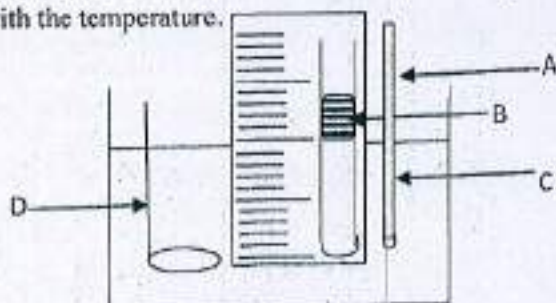

- (a) Label the parts A, B, C and D.

A:-.....  
 B:-.....  
 C:-.....  
 D:-.....

(b) Write an expression for air pressure trapped inside tube. Atmospheric pressure is  $P_0$  and saturated vapour at temperature  $\theta$ , is  $P_1$

.....  
.....  
.....

(c) How do you make sure that the tube is saturated with vapour?

.....  
.....  
.....

(d) Why is it required to have a uniform tube of small cross-sectional area?

.....  
.....  
.....

(e) The length of the air column at temperatures  $30^\circ\text{C}$  and  $42^\circ\text{C}$  are 40.4cm and 44.1cm respectively. Atmospheric pressure is 760mmHg. Saturated vapour pressure at  $30^\circ\text{C}$  is 32mmHg. Find the saturated vapour pressure at  $42^\circ\text{C}$ ?


.....  
.....  
.....  
.....

(f) Sketch the variation of saturated vapour pressure of water with the temperature. Mark its value at  $100^\circ\text{C}$ .


(g) Before measuring the length of the air column, the temperature in the water bath needs to be maintained steady. How can you do this?

.....  
.....  
.....  
.....

04) The diagram below show a simple arrangement of an ideal transformer.

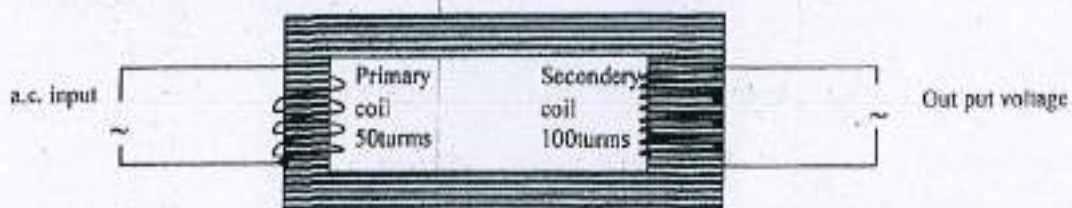

The graph shows how the output varies with time.

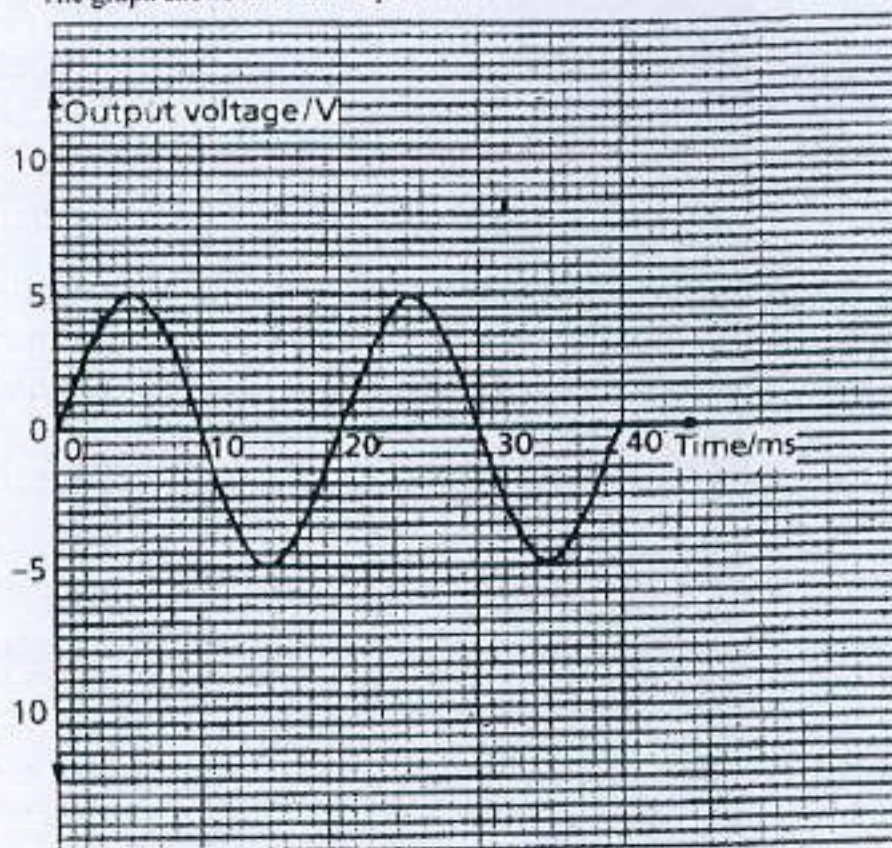

(a) Calculate the peak value of the input voltage.

(b) The number of the turns on the secondary coil is changed from 100 to 150. On the graph show how the out put voltage now varies with time

(c) Explain why a transformer will not operate using a direct current input.

(d) Why is input voltage and the out put voltage are not in same phase.

(e) Electrical energy is usually transmitted using alternating high voltage. Suggest one advantage, for the transmission having

i. Alternating;

ii. High voltage;



(f) An a.c. power of 120kW is supplied to a small town from a power plant 10km away. The transmission wires have resistance of  $0.02\Omega \text{ km}^{-1}$

i. Calculate the power loss if the power is transmitted at 240V.

.....  
.....  
.....

ii. Calculate the power loss if the power is transmitted at 24000V

.....  
.....  
.....


iii. Estimate how much power is saved if the voltage is stepped up from 240V to 24000V

.....  
.....  
.....

## Part A - Structured essay E02

- Answer only 4 questions.


05) (a) The diagram show a dam across a river having a trapezium shape cross section.

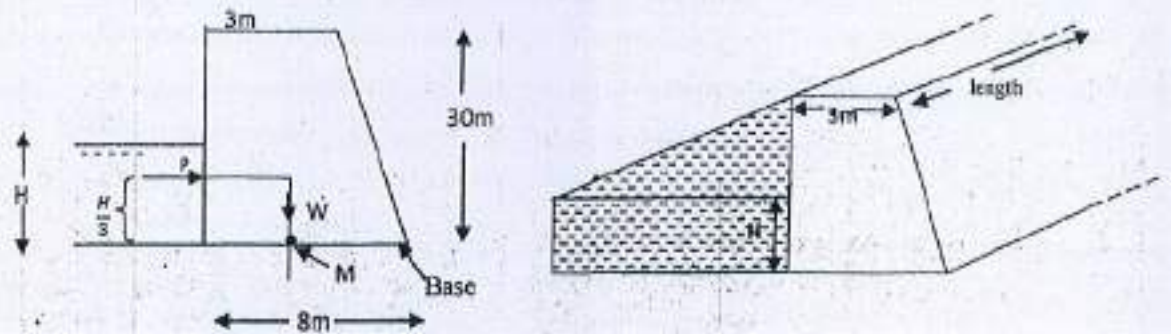

The breadth of the dam at the top	= 3m
The breadth at the bottom	= 8m
Height of the dam	= 30m
Weight of the concrete	= 24KN

- (i) Show that the force on a unit length of the dam due to hydrostatic pressure is given by  $P = \frac{H^2 w}{2}$  Where  $H$  is the depth of the river and  $w$  is the pressure per unit length.
- (ii) If  $H = 16\text{m}$  and  $w = 10^4 \text{ pam}^{-1}$  find  $P$  value in  $\text{KN m}^{-1}$ .
- (iii) Find the weight of a unit length of to dam in  $\text{KN m}^{-1}$ .
- (iv) Find the magnitude and direction of the resultant force acting on a unit length of the dam ( $R$ ).  
Hydrostatic force  $P$  and the weight of the dam  $W$  are acting through a point at height  $H/3$  from the bottom.
- (v) Copy the figure on to your answer script and mark  $P, W$  and  $R$ . Find the distance to the point where  $R$  cuts the basement from  $M$ .
- (b) The minimum operating level of the tank is  $1190\text{m ms}l$ . Total capacity level of the tank is  $1194\text{m ms}l$ .  $\text{ms}l$ (mean sea level) is the height to the water level from the sea level. Total surface area and the volume capacity of the tank are  $24 \times 10^4 \text{ m}^2$  and  $17.6 \times 10^5 \text{ m}^3$  respectively. When the water level is rising to spilt level, spilt gates are opened and the excess water is discharged. There are 5 spilt gates of area  $10\text{m} \times 9\text{m}$  in the dam, Discharges rate is  $3000\text{m}^3 \text{ s}^{-1}$
- (i) Water level rises from the minimum operating level to the maximum level during a rainy season. Find the capacity at the minimum operating level.
- (ii) Due to a continuous heavy rain all 5 spilt gates were opened. Find the speed of water leaving the gates.
- (c) Due to the discharged water flood situation occurs in low level area down the river. Houses and roads were submerged due to the flood. People were evacuated using boats. Density of flood water is  $1000\text{kgm}^{-3}$
- i. Find the height of water level that can make a refrigerator of size  $0.8\text{m} \times 0.6\text{m}$  floats in water. Mass of the refrigerator is  $150\text{kg}$ .
- ii. If boats of dimensions  $2.5\text{m} \times 1\text{m} \times 0.75\text{m}$  are used to evacuate people, how many persons of average mass  $60\text{kg}$  can be carried from one boat? Mass of the boat is  $1260\text{kg}$ .

- 06) An optical fiber uses the principle of total internal reflection to guide the light along the fibre.



Each fiber is coated in a cladding which prevents leakage of the light from sides. The cladding has a lower refractive index than the core. Optical fibers are used in medicine and communication where infrared light pulses carry digital signals. Also laser light is sent along fiber optic since it has a much spread of wavelengths.

- (a) Write two uses of fiber optics.  
 (b) write two conditions for total internal reflection?  
 (c) In which material, the core or the cladding, does the light have more speed? Explain.  
 (d) Refractive index of the core and the cladding are 1.6 and 1.4 respectively. Find the critical angle for these two mediums.  
 (e) A short pulse of white light is sent out at one end of an optical fibre 4km long. Calculate the time interval between the red and blue light emerging at other end given the speed of light in air is  $3 \times 10^8 \text{ms}^{-1}$  and refractive index of blue and red light 1.53 and 1.50 respectively.  
 (f) Fibre optics are used for decoration purposes also. A light sent out at one end leaves from the other end. This is seen as a light dot. This light dot is observed from a microscope in normal adjustment. Then its angular magnification is 10. One end of the microscope has a lens combination made of two convex lenses of focal length 6cm each. The other end has a convex lens of focal length 4cm.

- (i). Identify the objective and the eyepiece.  
 (ii). Find the object distance for the objective. *eyepiece*  
 (iii). Find the linear magnification of the objective  
 (iv). *Find the length of the microscope tube.*

- 07) (I) (a) Frictional force and viscos drag both oppose relative motion. Suggest one similarity and one difference between them.

- (b) The stress ( $\sigma$ ) between two planes of molecules in a moving liquid is given by

$$\sigma = \frac{\eta v}{x}$$

$v$  = difference in the velocities of the planes

$x$  = their distance apart

$\eta$  = constant for the liquid.

Find the deension of  $\eta$

- (c) A large wooden plate of area  $10\text{m}^2$  floating on the surface of a pond is move to move horizontally with a speed of  $2\text{ms}^{-1}$  by applying a tangential force. If the pond is 1m deep and the water in contact with bed is stationary, find the tangential force needed to the keep the plate moving. The coefficient of viscosity of water  $10^{-3}\text{Nms}^{-2}$ .
- (II) (a) Draw digrams to show the forces acting on a sphere falling through a viscos liquid.  
 (i). At the instent of release (at this moment the sphere is just underneath the surface)  
 (ii). When it has reached its terminel velocity
- (b) Write down an equation for the forces acting on the sphere in (a) (ii).
- (c) (i) describe the motion of a sphere projected downward through a viscos meduam. Assume that the projection velocity is grater them its termined velocity.  
 (ii) Sletch a graph for the velocity of the sphere against the time.


(d) A spherical ball of radius  $1 \times 10^{-4} \text{ m}$  and density  $10^4 \text{ kg m}^{-3}$  falls freely under gravity through a distance  $h$  before entering a tank of water. If after entering the water the velocity of ball does not change. (The viscosity of water is  $9.8 \times 10^{-4} \text{ Nsm}^{-2}$ )

- (i) Write down an expression for the velocity of the ball when it touches the water surface.
- (ii) What is the terminal velocity of the ball when it moves through the water. Density of  $10^3 \text{ kgm}^{-3}$ .  $g = 10 \text{ ms}^{-2}$
- (iii) Find the value of  $h$ .

08) a) An electron beam is accelerated from a potential difference 2000V. Then it is directed to a magnetic field of flux density  $1 \times 10^{-2} \text{ T}$  which extends in a vast area. If the beam enters to the field in different directions as given below, describe its path in each case.

- (i) (1) Parallel to the magnetic field.  
(2) Perpendicular to the field.  
(3) With some angle to the magnetic field.
- (ii) Calculate the maximum velocity gained by electrons when leaving the electric field.  
Charge of an electron =  $1.6 \times 10^{-19} \text{ C}$   
Mass of an electron =  $9 \times 10^{-31} \text{ kg}$
- (iii) (1) Calculate the distances travelled by electrons in  $1 \text{ ns}$  which entered parallel to the magnetic field.  
(2) Find the radius and the period of the circular of the path of electrons which entered perpendicular to the magnetic field.  
(3) Find the radius of the path of an electron entering the field with angle  $30^\circ$  with the field.

b) Mass spectrometer used to find the mass of an ion is shown in the diagram.

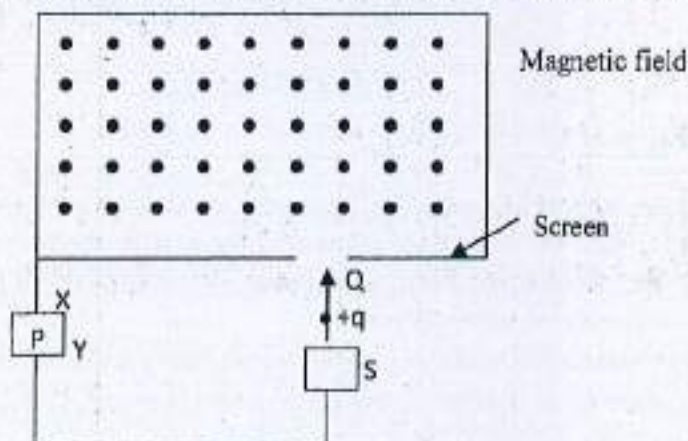

S is an ion source. It can emit ions of charge  $+q$ . These ions are accelerated by a potential difference  $V$  applied across Q and S. Then the ion enters a chamber from Q where uniform magnetic field of flux density  $B$  prevails.

- (i) P is a voltage source. What is the polarity of X?
- (ii) Copy the chamber area on to your answer script and draw the path of the ion in this area.
- (iii) Obtain an expression for the velocity of the ion  $U$  when entering the magnetic field. Mass of the ion is  $m$ ?
- (iv) The ion hits the screen at T. Mark T on your diagram. If  $QT = Y$ , obtain an expression in terms of  $m$ ,  $u$ ,  $B$  and  $q$ .

(v)



09) Answer only for A or B part.


(A) a) N number of cells of EMF  $E$  and internal resistance  $r$  connected in ,

- (i) Series      (ii) Parallel

are joined across an external resistor  $R$  separately.


- (i) Show that the same current flows through  $R$  in each case if  $R = r$ . Obtain an expression for the current through  $R$ .  
 (ii) Obtain an expression for  $R$  to generate a maximum power dissipation from it in each combination of cells.  
 i. Series  
 ii. Parallel.  
 (iii) If  $N = 6$ ,  $E = 2V$  and  $r = 0.1\Omega$  how many bulbs of resistance  $0.2\Omega$  should be connected in series to generate the maximum power dissipation through them if they are joined across the cells combination in series.

b) The above cells combination in series [ $N = 6$ ,  $E = 2V$ ,  $r = 0.1\Omega$ ] is charged using a dc current supply of EMF  $24V$  and internal resistance  $1\Omega$ . The circuit diagram for that is shown below.  $V_1$  and  $V_2$  are ideal voltmeter.

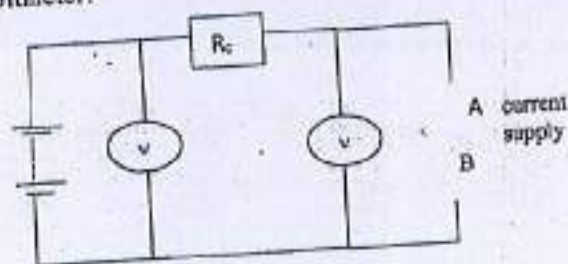

- i) What is the polarity of the terminal A?  
 ii) The current drawn by the current supply is  $4A$ . Calculate  $R_c$ ?  
 iii) Calculate  $V_1$  and  $V_2$  readings.


c) The above cells combination in series is used to drive a small motor. The motor is equivalent to a battery of back emf  $E$  and internal resistance  $2\Omega$  connected in parallel with a resistance  $21\Omega$  as shown in the diagram.

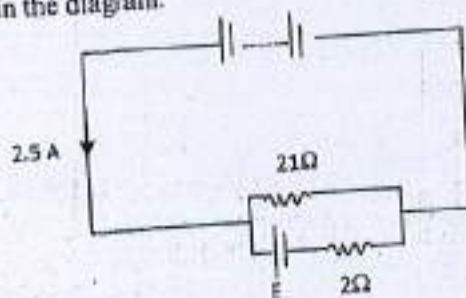

The current drawn from the cells combination is  $2.5A$

- (i) What is the current through  $2\Omega$  resistor?  
 (ii) Find the value of back emf  $E$ ?

- (iii) Immediately after the motor is switched on the back *emf*  $E$  is zero. Then very high current flows through the motor. To control this current a resistor  $R_0$  is connected in series with the motor. To limit the starting current to 3A what should be the  $R_0$  value?

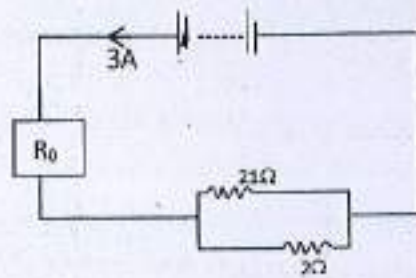

B) Analog to Digital Converter (ADC) and Digital to Analog Converter (DAC) are very important components in electronic equipment. ADC converts analog signals into digital signals without altering their essential content. DAC converts the processed digital signal back into the analog signal. As an example in Figure 1, ADC converts the analog signal collected by audio input equipment, such as a microphone, into a digital signal that can be processed by a computer. DAC converts the processed digital signal back into the analog signal that is used by audio output equipment such as a speaker.



Figure 1

- (a) The ADC shown in the diagram is used to convert the audio analog signal into digital signal. Consider a basic ADC with 2 outputs given in figure 2.

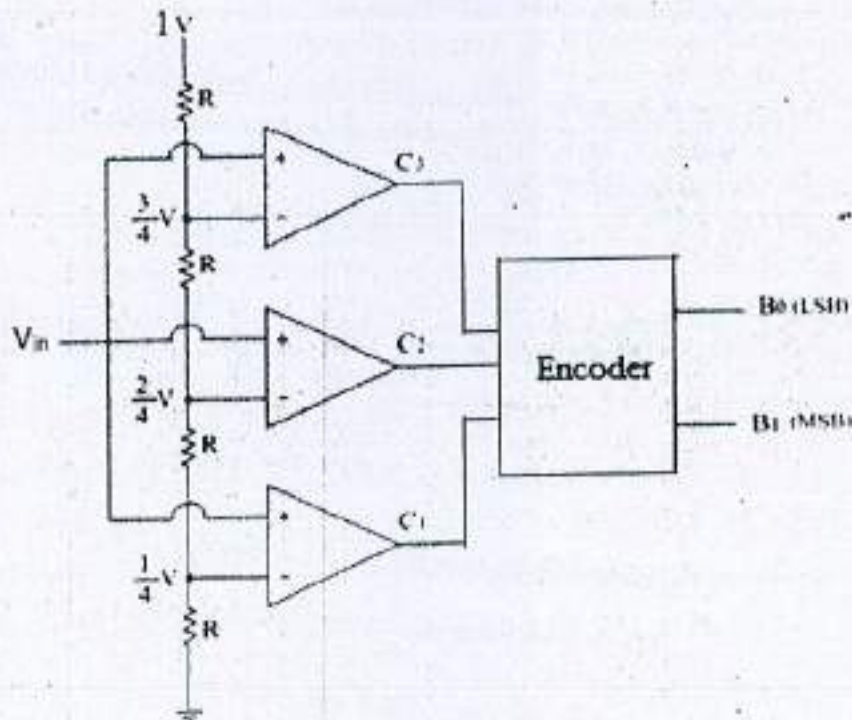


Figure 2

- (i) Copy the given table to your answer script and fill it giving digital values for  $C_1$ ,  $C_2$  and  $C_3$  for given input voltage ranges

Analogue input conditions(V)	Comparator outputs			Digital outputs	
	$C_1$	$C_2$	$C_3$	$B_1$	$B_0$
$0 < V_{in} < 0.25$				0	0
$0.25 < V_{in} < 0.5$				0	1
$0.5 < V_{in} < 0.75$				1	0
$0.75 < V_{in} < 1$				1	1

- (ii)  $C_1$ ,  $C_2$  and  $C_3$  values are applied to further coding circuit (encoder) to get the digital outputs  $B_1$  and  $B_0$ . Design a circuit for the encoder using basic logic gates

- (b) Op amps shown in the diagram acts as a summing amplifier. It can add input values  $V_1, V_2$ . This also acts a

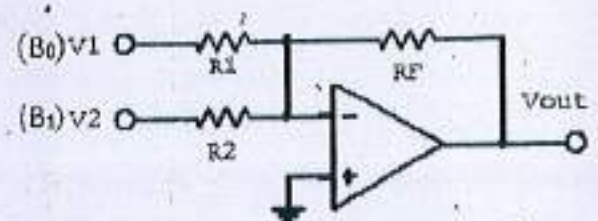


Figure 3

#### DAC

- (i) Obtain an expression for  $V_{out}$  in terms of data given in the diagram  
 (ii) Rewrite the expression for  $V_{out}$  taking  $R_1=R_2=R_F=R$

- (c) Analogue audio signal produced by a microphone is shown in the figure 4.

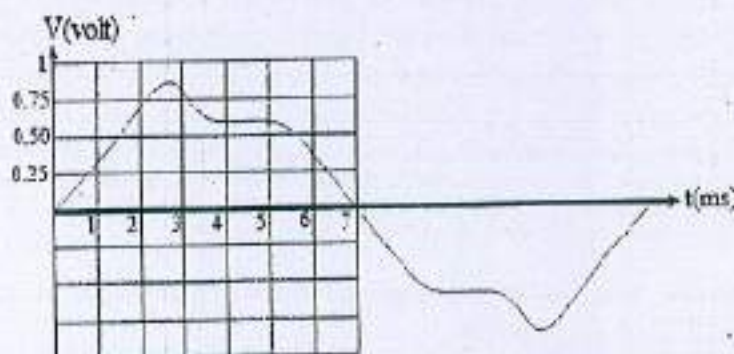



Figure 4

This analogue signal is applied to the ADC to produce digital signal then to a computer for processing. After that it is again applied to the DAC

- (i) Copy the table given on to your answer script and fill it giving ADC outputs and DAC output for input voltages at given time intervals. Take  $R_F=R$ ,  $R_1=20R$ ,  $R_2=10R$ , Digital signal reference voltage is 5 V.

Time(ms)	ADC outputs		DAC output(v)
	$B_1$	$B_0$	
0			
1			
2			
3			
4			
5			
6			
7			

(ii) Reproduce the output signal generated by the DAC using the above table.

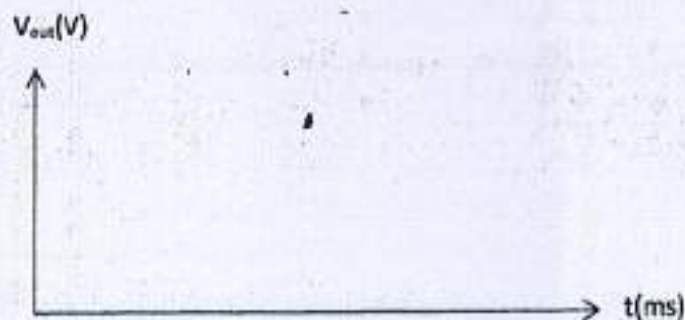

(d) Why is it useful to digitalize an analogue signal before it is being transmitted and processed by a computer?

10) Answer only for A or B part.

(A) (i) Define the thermal conductivity.

(ii) The operation of a petrol engine is described below.

The engine consists of several cylinders. Some air is trapped inside them by pistons. The air is suddenly compressed by lifting the pistons and the temperature is raised to the ignition point of the petrol. Then the petrol vapour is injected in to the cylinder and allow for self combustion. Due to this the air quickly expands and the piston is moved downward. The burned air is removed from the cylinder. The heat produced due to the combustion leaks from the cylinder and it is absorbed by the wall of the engine. Due to this the temperature at the inner side of the engine wall rises to  $180^{\circ}\text{C}$ . By a water circulation through the engine wall its temperature is reduced back to  $80^{\circ}\text{C}$ . The water leaving the engine at  $80^{\circ}\text{C}$  is sent through a radiator and the temperature is further reduced to  $30^{\circ}\text{C}$ . Now this cooled water is again circulated through the engine.

(a) Explain how the temperature is raised when air is suddenly compressed, using thermodynamic principles.

(b) Find the rate of heat flow through the walls of engine using following data.

The effective area of the wall  $= 6.25 \times 10^{-2} \text{ m}^2$

Thickness of the wall  $= 0.5 \text{ cm}$

Thermal conductivity  $= 2 \text{ W m}^{-1} \text{ K}^{-1}$

(c) Find the rate of water circulation through the engine to maintain the inner wall temperature at  $80^{\circ}\text{C}$ . The specific heat capacity of water is  $4000 \text{ J kg}^{-1} \text{ K}^{-1}$


(d) The temperature surrounding the radiator is maintained at  $20^{\circ}\text{C}$  by operating a cooling fan. What should be the minimum surface area of the radiator to maintain the temperature of water at  $30^{\circ}\text{C}$  in the radiator.

The emissivity of the radiator surface is  $0.8 \text{ W m}^{-2} \text{ K}^{-1}$

(e) Due to the decrease of the fan speed surrounding temperature rises to  $30^{\circ}\text{C}$ . Explain how does it effects the engine operation.



(B) When high frequency radiation is incident on a metal surface, electrons are emitted from the surface. To demonstrate this effect following experimental set up is used.

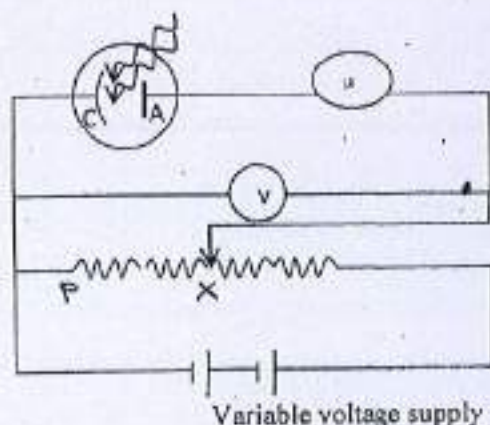

C and A are cathode and anode respectively made of well polished group 1 metal such as potassium (K) and cesium (Cs). Electrodes are inside vacuumed glass bulb and they are connected to an external circuit as shown in the diagram. When the tube is in a dark room, the reading of the microammeter is zero. When high frequency monochromatic radiation beam is incident on the cathode, the ammeter shows a reading.

- What is the name of the effect discussed from the passage?
- If the frequency of the radiation is below a certain critical value, electrons are not emitted from the cathode whatever high intensity beam is incident on it. What is this frequency called?
- Radiation of high frequency is incident on the cathode. Sketch the variation of ammeter reading with the potential at X with respect to P. Consider both positive and negative potential at X.
- Sketch the variation of ammeter reading with the potential at X on same axis for three experiments which used light intensities  $I$ ,  $2I$  and  $3I$  at same frequency.
- What is meant by a work function of a metal?
- Write down the Einstein equation which explains the effect discussed in the passage and define the terms.
- Obtain an expression for the stopping potential using the equation mentioned in part (f)
  - Sketch the variation stopping potential with the frequency
  - How do you find the plank constant and the work function using the graph.
- Work function of the sodium metal is 2.3 eV.
  - Find the threshold frequency for sodium.
  - Sodium metal is illuminated from radiations of wave length  $4.5 \times 10^{-7} \text{m}$ . Find the maximum velocity of electrons emitted from the metal.
  - Find the stopping potential for above mentioned wave length.

Plank constant (h) =  $6.6 \times 10^{-34} \text{Js}$   
 Speed of light (c) =  $3 \times 10^8 \text{ms}^{-1}$   
 Mass of an electron (m) =  $9.1 \times 10^{-31} \text{Js}$   
 1eV =  $1.6 \times 10^{-19} \text{J}$

Gr-13 July 2016

(i) (a)  $L = I\omega$   
 $= 4.1 \times 2.7$   
 $L = \underline{11.07 \text{ kg m}^2 \text{ s}^{-1}}$  — (01)

(ii) කෝණික ගම්‍යතාව යනු <sup>සමකාලීන</sup> දෘඪවස්තු වල කෝණික ප්‍රවේගයේ, වස්තුවේ ප්‍රවේගයේ ප්‍රතිලෝමයයි. ( $L = I\omega$ ) — (01)  
 කෝණික ගම්‍යතාව යනු සමකාලීන දෘඪවස්තු වල ජෛව ගම්‍යතාවේ ප්‍රවේගය ලෙස. — (01)

(iii) විභාග: ගම්‍ය: චාලක: නියමයන්  $I_1\omega_1 = I_2\omega_2$   
 $11.07 = (4.1 + 2.5 \times 0.6 \times 0.6)\omega_2$   
 $11.07 = 5\omega_2$   
 $\omega_2 = \underline{2.21 \text{ rad s}^{-1}}$  — (01)

(b) කෝණික ගම්‍යතා සංස්ථිති නියමය — ප්‍රභව ප්‍රවේගයක යෙදවීම සඳහා වස්තුවක ගම්‍යතාව වෙනස් වීමට හේතු වන්නේ එහි කෝණික ප්‍රවේගයේ වෙනස හෝ කෝණික ගම්‍යතාවේ වෙනස නිසාය. නමුත් කෝණික ගම්‍යතාවේ වෙනසක් නොවන පරිදි, ගම්‍යතාවේ වෙනස් වීමට හේතු වන්නේ වස්තුවේ කෝණික ගම්‍යතාවේ වෙනස් වීමයි. — (01)

(c) කෝණික ප්‍රවේගය යනු අවස්ථාව.  
 ගේඵල — චාලක දී  $I$  වැඩිවීම නිසා  $I = \sum mr^2$  ට අනුව  $I$  වැඩිවේ.  $L$  නියමයට අනුව  $\omega \uparrow$  වේ. — (01)

(d)  $2.21 \text{ rad s}^{-1}$  — (01)

(iv) (a)  $\omega = \omega_0 + \alpha t$  ඔප්පු  
 $\alpha = \frac{\omega - \omega_0}{t}$   
 $= \frac{0 - 1.5}{0.75}$   
 $= \underline{-2 \text{ rad s}^{-2}}$  — (01)

(b)  $\tau = I\alpha$  — (01)  
 $= 4.5 \times (-2)$   
 $= \underline{-9 \text{ Nm}}$  — (01)

10

(2) වාත තද බවකය වී තීව්‍රතාවන් නිරූපණය කරන ලදී (01)  
 සඳහා

- (b) තව් තුටු වූවේ නමුත් අනි තිසා උපරිම වුවහොත්  
 (01) ලබා දෙන තව්වේ අනුපාත අවමයට හරිත පැහැය වැඩි වූයේ  
 (c) වේලු වල අතර වෙනස අතිම අසාදන නිසා වර්ග  
 නිවැරදි කර ගත හැකිය. මෙහි නිසා, අනුපාත  
 (01) වැඩි අතර නිවැරදි මග අනි තව්වේ අනුපාතය  
 වැඩිවීම නිසා වැඩි වූයේ වේලු වැඩි කරන

(d)  $\lambda = 40 \text{ cm}$  (01)

$v = n \lambda$

$\sqrt{\frac{F}{m}} = 500 \times 40 \times 10^{-2}$  (01)

$\frac{20}{m} = 200 \times 200$

$m = \underline{5 \times 10^{-4} \text{ kg m}^{-1}}$  (01) (with units)

(e)  $T' = mg - u$

$= 20 - 12 \times 10^{-4} \times \rho \times 10$  (01)

$= 20 - 12 \times 10^{-3} \rho$

$v = n \lambda$   
 $\sqrt{\frac{T'}{m}} = 500 \times 30 \times 10^{-2}$

$\frac{T'}{m} = 150 \times 150$

$20 - 12 \times 10^{-3} \rho = 225 \times 10^2 \times 5 \times 10^{-4}$

$\rho = \underline{729.16 \text{ kg m}^{-3}}$  (01)

$f = \frac{1}{2\lambda} \sqrt{\frac{T'}{m}}$  (01)

(f) නිවැරදි වන  $f$  තව්:  $f = \frac{1}{2 \times 80 \times 10^{-2}} \sqrt{\frac{20}{5 \times 10^{-4}}}$   
 $= \frac{10}{16} \times 2 \times 100$

$= 125 \text{ Hz}$

නිවැරදි වන  $f = 130 - 125 = \underline{5}$  (01)

- (3) (a) A - උෂ්ණත්වය  
 B - ප්‍රභව ධාරිතාව  
 C - සමස්ත ජීවන කාලය  
 D - වනජීවී

(b) වියළි භාගයේ ජීවන කාලය =  $P_0 - P_1$  (01)  
 උපකල්පනය - ප්‍රභව ධාරිතාවේ බරපතල ජීවන කාලයක් වූවක් නොවේ. (01)

(c) භාගය අඩු වන ප්‍රභව ධාරිතාව ගැන පැහැදිලි කරන්න. (01)

(d) ජීවන කාලය -  $V \propto L$  විෂය (01)  
 ක්‍රියා ගතවනවා - ආවේණික වැඩි විෂය (01)  
 (3වන ධාරිතාව වැඩි වන ගැටීමට).

(e) නියමය  $\frac{P_1 V_1}{T_1} = \frac{P_2 V_2}{T_2}$  යොදවමු


$$\frac{(760 - 32) 40.4}{(273 + 30)} = \frac{(760 - P_0') 44.1}{(273 + 42)} \quad (01)$$

$$\frac{728 \times 40.4}{303} = \frac{(760 - P_0') \times 44.1}{315}$$

$$760 - P_0' = \frac{728 \times 315 \times 40.4}{303 \times 441} = 693.33$$

$$P_0' = 760 - 693.33$$

$$P_0' = 66.67 \text{ Hgmm} \quad (65 - 69) \text{ යුගම}$$

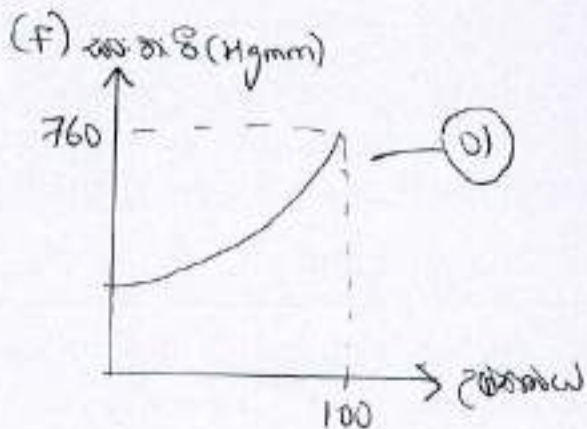

(g) වෘද්ධ උෂ්ණත්වයට වන  $1^\circ, 2^\circ$  වර්ධන වල තාපකාලය උෂ්ණත්වය වූ විට දැවුණු භාගයක් සහ වෙනත් වනජීවීන් කිරීම. (01)  
 or

වෘද්ධ උෂ්ණත්වයට වන  $1^\circ, 2^\circ$  වර්ධන වල තාපකාලය උෂ්ණත්වය

වෙනත් වනජීවීන් සහ දැවුණු භාගය ඉතිරි කර ගෙන යාම

# MCQ — 2016

(1) - 4	(11) - 1	(21) - <del>1</del> 1	(31) - 3	(41) - 5
(2) - 5	(12) - 5	(22) - 4	(32) - 4	(42) - 4
(3) - 2	(13) - 1	(23) - 2	(33) - 4	(43) - 2
(4) - 5	(14) - 2	(24) - 3	(34) - 1	(44) - 3
(5) - 2	(15) - 4	(25) - 3	(35) - 3	(45) - 4
(6) - 1	(16) - 2	(26) - 2	(36) - 5	(46) - 3
(7) - 1	(17) - 3	(27) - 3	(37) - 1	(47) - 2
(8) - 3	(18) - 4	(28) - 1	(38) - 4	(48) - 2
(9) - 11	(19) - 4	(29) - 4	(39) - 2	(49) - 2
(10) - 3	(20) - 3	(30) - 1	(40) - 11	(50) - 3

(A)

$$a) \frac{V_o}{V_i} = \frac{100}{50}$$


$$\frac{V_s}{V_p} = \frac{N_s}{N_p}$$

$$\frac{5}{V_i} = \frac{100}{50}$$

$$V_i = 2.5V$$

— (01)

(b)

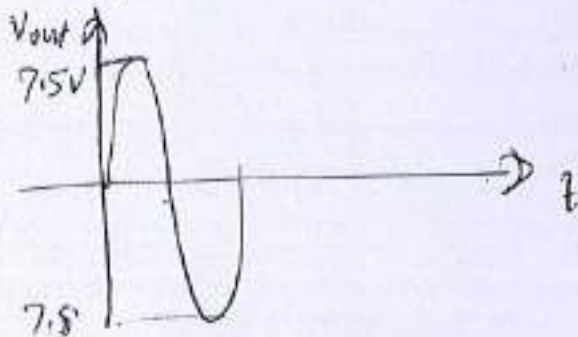

— (01)

$$\frac{V_o}{2.5} = \frac{150}{50}$$

$$V_o = 2.5 \times 3$$
$$V_o = 7.5V$$

(c) ප්‍රාග්ධනෝත්පාදක ක්‍රියාත්මක වන්නේ ප්‍රවේගය ~~වැඩි~~ වැඩි වීමේදී වේ. මෙහිදී වීදුරු බෝම්බයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. — (01)

(d) ප්‍රකාශය විභ්‍රමණය වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. — (01)

(i) ප්‍රකාශය විභ්‍රමණය වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. — (01)

(ii) ප්‍රකාශය විභ්‍රමණය වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. මෙහිදී ප්‍රකාශයේ වර්තන දර්ශකය වෙනස් වීම නිසා ප්‍රකාශය විභ්‍රමණය වේ. — (01)

$$(f) (i) \quad V = IR$$

$$\quad \quad \quad \leftarrow 200 = 5A$$

$$(f) (ii) \quad P = VI$$

$$120 \times 10^3 = 240 \times I \quad \text{--- (01)}$$

$$I = 500 \text{ A}$$

$$\begin{aligned} \text{अव्यय नुक़ान} &= I^2 R \\ &= 500^2 \times 10 \times 10^{-2} \times 2 \quad \text{--- वास्तव 2x1 अंक.} \\ &= \cancel{20 \times 10^3} \text{ W} = 100 \text{ kW.} \quad \text{--- (01)} \end{aligned}$$

$$(ii) \quad 120 \times 10^3 = 24,000 I$$

$$I = 5 \text{ A}$$

$$\begin{aligned} \text{अव्यय नुक़ान} &= 5^2 \times 10 \times 10^{-2} \times 2 \\ &= 10 \text{ W} \quad \text{--- (01)} \\ &= 0.01 \text{ kW} \end{aligned}$$

$$(iii) \quad \cancel{99 \text{ kW}} \quad \text{--- (01)}$$

$$99.99 \text{ kW}$$


(5) (i) L දිගේ මත ඇති බලය =  $\frac{0+H\rho g}{2} \cdot H \cdot L$   
 $= \frac{H}{2} \rho g \cdot H \cdot L$   
 ඒකක දිගක මත ඇති බලය  $P = \frac{H/2 \rho g \cdot H \cdot L}{L}$  — (01)  
 $P = \frac{H^2}{2} \omega \cdot (\omega = \rho g)$

(ii) P හි අගය  
 $= \frac{H^2 \omega}{2}$   
 $= \frac{16^2 \times 10 \times 10^3 \text{ m}^2 \times \text{kgm}^{-1} \times \text{s}^{-2}}{2}$   
 $= 1280 \text{ kNm}^{-1}$  — (01)

(iii) ඒකක දිගක බර W  
 $W = 24 \times \left[ 30 \left( \frac{3+8}{2} \right) \right] \frac{\text{kNm}^3}{\text{m}^2}$   
 $= 24 \times 30 \times 11$  — (01)  
 $= 3,960 \text{ kNm}^{-1}$  — (01)

(iv) සමස්ත බලය R  
 $R = \sqrt{1280^2 + 3960^2}$   
 $= 4161.73 \text{ kNm}^{-1}$  — (01)

බරය සමඟ සාදන  $\theta$  කේ  
 $\tan \theta = P/W = \frac{1280}{3960}$   
 $= 0.3232$   
 $\theta = 17^\circ 54'$  — (01)

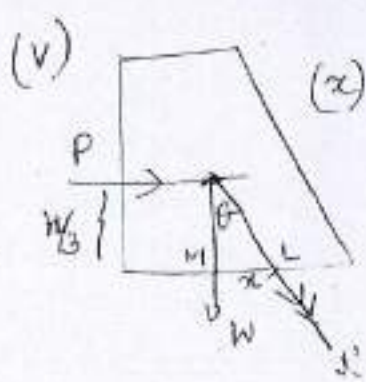

(v) (x) LM ප්‍රභ සේවීමට L ප්‍රභුණුණු ගැනීම  
 $R \cdot 0 = P \times \frac{H}{3} = W \cdot x$  — (01)  
 $x = \frac{P}{W} \cdot \frac{H}{3}$   
 $= 0.3232 \times \frac{16}{3}$   
 $= 1.724 \text{ m}$  — (01)



(b) (i) ඉහළ ගිය ජලයේ ද්‍රව්‍ය =  $1194 - 1190 = 4\text{m}$   
 ඉහළ ගිය ජල චරිත =  $4 \times 24 \times 10^4$   
 $= 96 \times 10^4 \text{m}^3$   
 ආවේණික ජල ගිණුම =  $176 \times 10^4 \text{m}^3 - 96 \times 10^4 \text{m}^3$   
 $= 80 \times 10^4 \text{m}^3$  — (01)

(ii) 100 ප්‍රොසෙසර් ඉරියව්‍ය =  $10 \times 9 = 90 \text{m}^2$   
 100 ප්‍රොසෙසර් පහත ඉරියව්‍ය =  $90 \times 5 = 450 \text{m}^2$  — (01)  
 ජලය පිටත වේගය =  $\frac{3000 \text{m}^3 \text{s}^{-1}}{450 \text{m}^2}$   
 $= 6.67 \text{ms}^{-1}$  — (01)

(c) (i) ගිණුම් කිරීමේදී ඉහළින් සිටින ස්ථරයේ වර්ෂා (ප්‍රතික්‍රියා  $R = 0$  බැවින්)

ඉහළින්  $(0.6 \times 0.8 \times h) 1000 \text{g} = 150 \text{g}$  — (01)

පහත වී ජල මට්ටම.  $h = \frac{1.07 \text{m}}{0.3125 \text{m}}$  — (01)

(ii) බෝට්ටුවේ චරිත =  $2.4 \times 1 \times 0.75 = 1.8 \text{m}^3$

බෝට්ටුවේ සමතුලිතතාව සඳහා,

$1.8 \times 1000 \text{g} = (1260 + 60 \times n) \text{g}$

$n = \frac{540}{60}$

$= 9$  — (01)

(iii) ජලය (හමු වූ) ඒකකයක් ආවේණිකව ගැනීම සඳහා භාවිත කරන ජලය — (01)


(b) (a) ഒരേയ്ക്കു താലൂക്കു വൃത്താ  
 ചുറ്റിക്കൊണ്ടു താലൂക്കു വൃത്തം (01)

(b) കൃത്യം വൃത്താകര പരമാർശനം  
 ഉപയോഗം: വൃത്താകര താലൂക്കു വൃത്തം വെ  
 പ്പെടുത്താൻ താലൂക്കു വൃത്തം (01)

(c) താലൂക്കു വൃത്താകര വൃത്തം ( $n_{\text{air}} > n_{\text{glass}} \therefore v_{\text{air}} > v_{\text{glass}}$ )  
 വൃത്താകര വൃത്താകര വൃത്തം, വൃത്താകര വൃത്താകര  
 വൃത്താകര വൃത്താകര വൃത്താകര (01)

(d)  $n_x \sin \theta = n_y \sin \phi$  ;  $\frac{n_y}{n_x} = \frac{\sin \theta}{\sin \phi}$  (01)

$\sin \theta = \frac{1.4}{1.6} = 0.875 \Rightarrow \theta = \underline{61^\circ 2'}$  (01)



(e) രണ്ടു വൃത്താകര വൃത്താകര വൃത്താകര വൃത്താകര വൃത്താകര  
 $v_A$  or  $v_B$  താലൂക്കു വൃത്തം.

$n_R - n_L = \frac{v_L}{v_R}$

$v = \frac{c}{f}$

$t = \frac{d}{v}$

$v_A = \frac{3 \times 10^8}{1.5}$  or  $v_B = \frac{3 \times 10^8}{1.53}$  (01)

താലൂക്കു വൃത്താകര വൃത്താകര വൃത്താകര വൃത്താകര വൃത്താകര

$T = \frac{4000 \times 1.53}{3 \times 10^8} = \frac{4000 \times 1.53}{3 \times 10^8}$

$n = \frac{c}{v} = \frac{4000}{3 \times 10^8} \times 0.103$

$T = \underline{4 \times 10^{-7} \text{ s}}$  (01)

(f) (i)  $\frac{1}{F} = \frac{1}{f_1} + \frac{1}{f_2}$  (01)  $\frac{1}{F} = \frac{1}{-4} + \frac{1}{-6} = \frac{-2}{6} = -\frac{1}{3}$

$F = 3 \text{ cm}$  (01)  $F = -3 \text{ cm}$

$\therefore F_o = 3 \text{ cm}$

$F_e = 4 \text{ cm}$  (01)

(ii)  $\frac{1}{v} - \frac{1}{u} = \frac{1}{f}$  (01)  $\frac{1}{25} - \frac{1}{u} = \frac{1}{-4}$   $u = \underline{3.4 \text{ cm}}$  (01)

$\frac{1}{v} = \frac{1}{25} + \frac{1}{4}$

$\frac{1}{v} = \frac{29}{100}$

$u = \frac{100}{29} = 3.4 \text{ cm}$

$$m_e = \frac{25 \times 29}{100} = 25$$

$$m_e = \frac{25}{100/29} = \frac{25 \times 29}{100}$$

(iii)  $\therefore$   $\frac{m}{m_0} = \frac{25}{100} \times 29 = \frac{25 \times 29}{100}$  (01)  $\frac{m}{m_0}$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = \underline{\underline{1.38}}$  (01)

(iv)  $\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$   
 38%  $\therefore$   $\frac{m}{m_0} = 1.38$   
 38%  $\therefore$   $\frac{m}{m_0} = 1.38$

$\frac{1}{v} - \frac{1}{u} = \frac{1}{f}$

$\frac{1}{40} - \frac{1}{u} = \frac{1}{4} \Rightarrow \frac{1}{u} = \frac{1}{40} - \frac{1}{4} = \frac{1-10}{40} = \frac{-9}{40}$  (01)

$u = 40/11$

$u = 3.64 \text{ m}$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\frac{1}{v} - \frac{1}{u} = \frac{1}{f}$   $\therefore$   $\frac{1}{v} - \frac{1}{100} = \frac{1}{3}$

$\frac{1}{v} = \frac{29}{100} + \frac{1}{3} = \frac{87+100}{300} = \frac{187}{300}$

$v = -300/22$  (01)

$v = -300/22$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$10 = m_0 \times \frac{40}{40/11} = 11m_0$

$m_0 = 10/11$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\frac{1}{v} - \frac{1}{u} = \frac{1}{f} \Rightarrow \frac{1}{v} - \frac{1}{10} = \frac{1}{3}$

$1 + \frac{10}{v} = \frac{1}{3} \Rightarrow v = \frac{21}{11} = 1.91$

$v = \frac{63}{11} = 5.73 \text{ cm}$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\frac{1}{v} - \frac{1}{u} = \frac{1}{f}$

$\frac{1}{v} - \frac{1}{10} = \frac{1}{3}$

$\frac{1}{v} = \frac{1}{3} + \frac{1}{10} = \frac{10+3}{30} = \frac{13}{30}$

$1 + m_0 = \frac{v}{f_0}$

$1 + \frac{40}{29} = \frac{v}{3}$

$\frac{69}{29} \times 3 = v$

$v = 7.14 \text{ cm}$  (01)

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

$\therefore$   $\frac{m}{m_0} = \frac{10}{29/4} = 1.38$

1. (7) (a) ജാഗ്രത -

ലഭ്യമായ ഏതെങ്കിലും പ്രത്യേക വിധത്തിൽ ഉൾക്കൊള്ളിക്കുക

ലഭ്യമായ ഏതെങ്കിലും പ്രത്യേക വിധത്തിൽ ഉൾക്കൊള്ളിക്കുക (10)  
 ഉൾക്കൊള്ളിക്കുക 2 മി. ദൂരം കൂടുതൽ കർമ്മം കൂടുതൽ  
 പ്രത്യേക വിധത്തിൽ ഉൾക്കൊള്ളിക്കുക  
 3 മി. ഉൾക്കൊള്ളിക്കുക 2 മി. ദൂരം കൂടുതൽ കർമ്മം  
 കർമ്മം കൂടുതൽ കർമ്മം കൂടുതൽ കർമ്മം ഉൾക്കൊള്ളിക്കുക  
 കർമ്മം

കർമ്മം


പ്രത്യേക വിധത്തിൽ ഉൾക്കൊള്ളിക്കുക

മനസ്സിലാക്കുക  
 • ജാഗ്രതയോടെ ഉൾക്കൊള്ളിക്കുക ഉൾക്കൊള്ളിക്കുക ഉൾക്കൊള്ളിക്കുക  
 • മറ്റേ പ്രത്യേക വിധത്തിൽ ഉൾക്കൊള്ളിക്കുക ഉൾക്കൊള്ളിക്കുക ഉൾക്കൊള്ളിക്കുക.

(b)  $\sigma = F/A = \frac{\eta v}{x}$

$$[\eta] = \left[ \frac{Fx}{Av} \right] = \frac{MLT^{-2} \cdot L}{L^2 \cdot LT^{-1}} = \underline{MLT^{-1}} \quad \text{--- (1)}$$

(c)



$$F = \eta A \frac{dv}{dx}$$

$$= 10^{-3} \times 10 \times (2-0) \quad \text{--- (2)}$$

$$= 2 \times 10^{-2} \text{ N} \quad \text{--- (3)}$$

2 (a) (i)





(ii)



(b)

$$F + q = mg \quad \text{--- (4)}$$

(c) If fluid is incompressible, then  
 volume of fluid is constant. In  
 this case, the velocity of fluid  
 is constant. The pressure of fluid  
 is constant. The temperature of fluid  
 is constant. The density of fluid  
 is constant. The viscosity of fluid  
 is constant. The surface tension of fluid  
 is constant. The capillary action of fluid  
 is constant. The contact angle of fluid  
 is constant. The wetting of fluid  
 is constant. The adhesion of fluid  
 is constant. The cohesion of fluid  
 is constant. The surface energy of fluid  
 is constant. The surface entropy of fluid  
 is constant. The surface free energy of fluid  
 is constant. The surface tension of fluid  
 is constant. The surface energy of fluid  
 is constant. The surface entropy of fluid  
 is constant. The surface free energy of fluid  
 is constant.

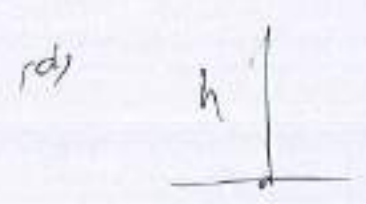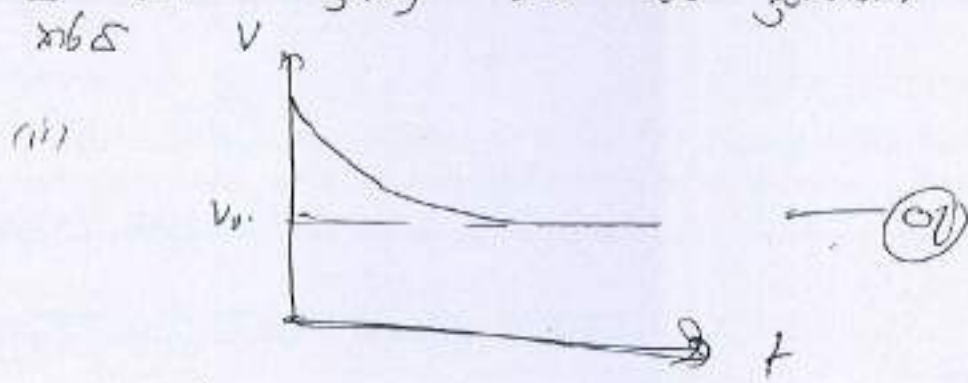

(i)  $v^2 = 2gh$   
 $v = \sqrt{2gh}$  — (01)

(ii)  $v_0 = \frac{2a^2(\sigma - \rho)g}{9\eta}$   
 $= \frac{2 \times (10^{-4})^2 (10^4 - 10^3) \times 10}{9.8 \times 10^{-6}} \times 10$  — (01)  
 $= \frac{2 \times 10^{-8} \times 10^3 (10-1) \times 10}{9.8 \times 10^{-6}} = 20.41 \times 10^2$   
 $v_0 = 20.41 \text{ m/s}$  — (02)


(iii)  $20.41 = \sqrt{2gh}$   
 $(20.41)^2 = 20 \times h$  — (0.6)  
 $h = 20.83 \text{ m}$

(iv)


$F + U = mg$   
 $6 \times 10^3 \times \frac{4}{3} \times 10^{-3} \times g = \frac{4}{3} \times 10^3 \times a \times g$   
 $6 \times 10^3 \times \frac{4}{3} \times 10^{-3} \times g = \frac{4}{3} \times 10^3 \times a \times g (0-1)$   
 $v = \frac{24 a^3 g (0-1)}{3 \times 6 a \eta}$   
 $v = \frac{2 a^2 (\sigma - \rho) g}{9 \eta}$

08 (a) I (3)


1




— (01)

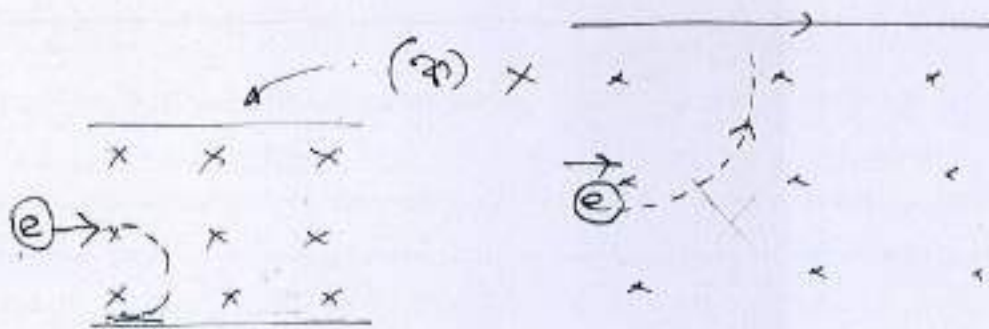

— (01)

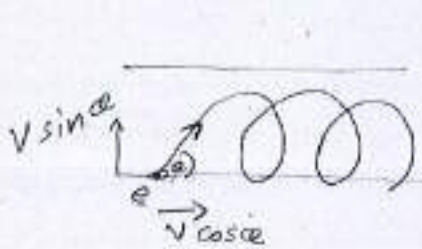

(3)

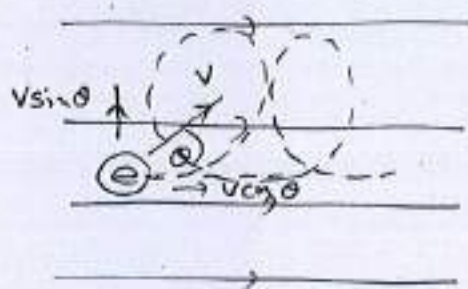

— (01)

IV

$$\frac{1}{2}mv^2 = eV$$

$$\frac{1}{2} \times 9 \times 10^{-31} \times v^2 = 1.6 \times 10^{-19} \times 2000$$

$$v^2 = \frac{16 \times 4 \times 10^{14}}{3} \Rightarrow v = \frac{8 \times 2 \times 10^7}{3}$$

$$v = 26.67 \times 10^6 \text{ ms}^{-1} \quad \text{— (01)}$$

III

(2)

$$V = \frac{q}{t}$$

$$\text{energy} @ \text{ } 36 = 26.67 \times 10^6 \times 1 \times 10^{-9}$$

$$= 26.67 \times 10^{-3} \text{ m} \quad \text{— (01)}$$

(3)

$$Bqv = \frac{mv^2}{r}$$

$$r = \frac{mv}{Bq}$$

$$r = \frac{9 \times 10^{-31} \times 26.67 \times 10^6}{1 \times 10^{-4} \times 1.6 \times 10^{-19}} \quad \text{— (01)}$$

$$r = 150.02 \times 10^{-2} \text{ m}$$

$$r = 1.50 \text{ m} \quad \text{— (01)}$$

ଅନୁରୋଧ କରାଯାଇଛି ।

$$T = \frac{2\pi}{\omega}$$

$$T = \frac{2\pi r}{v}$$

$$T = \frac{2 \times 3.14 \times 1.5}{26.67 \times 10^6}$$

~~$$T = \frac{2 \times 3 \times 1.5 \times 10^{-9}}{26.67 \times 10^6}$$~~

$$T = 3.53 \times 10^{-14} \text{ s} \quad \text{--- (01)}$$

~~$$T = 0.337 \times 10^{-15}$$~~

~~$$T = 3.37 \times 10^{-16} \text{ s} \quad \text{--- (01)}$$~~

$$(2) \quad Bq \times v \sin 30^\circ = \frac{m(v \sin 30^\circ)^2}{r}$$


$$r = \frac{m \times v \times \frac{1}{2}}{Bq}$$

$$r = \frac{9 \times 10^{-31} \times 26.67 \times 10^6}{2 \times 1 \times 10^{-4} \times 1.6 \times 10^{19}} \quad \text{--- (01)}$$

$$r = 75.0 \times 10^{-2} \text{ m} //$$

(b) I ଅବସ୍ଥା ପ୍ରଦର୍ଶନ କରନ୍ତୁ । --- (01)

ii

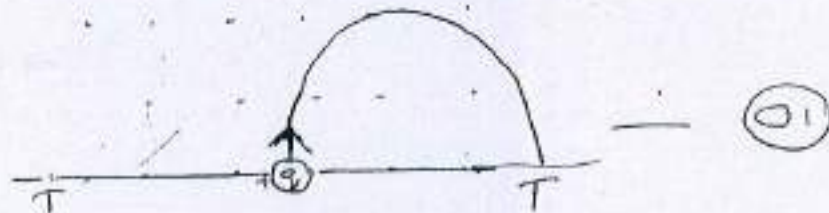

$$\frac{1}{2} m u^2 = qV$$

$$u = \sqrt{\frac{2qV}{m}} \quad \text{--- (01)}$$

iii

T ଅବସ୍ଥା ଅନୁସାରେ

$$F = m a, \quad Bq u = m \frac{u^2}{r} \times 2 \quad \left. \begin{array}{l} Bq u = \frac{m u^2}{r} \\ (1 - \frac{1}{2}) \end{array} \right\} \text{--- (01)}$$

$$r = \frac{2m u}{Bq}$$

v

$$m = \frac{BqY}{2u}$$

$$m = \frac{BqY}{2} \sqrt{\frac{m}{2qV}}$$

$$m^2 = \frac{B^2 q^2 Y^2 m}{8qV}$$

$$m = \frac{(1 \times 10^{-4})^2 \times (1.602 \times 10^{-19})^2 \times (1.6254)^2}{8 \times (1.6022 \times 10^{-19}) \times 1 \times 10^3}$$

$$m = 0.53 \times 10^{-30} \text{ kg} \quad \text{--- (1)}$$

$$m = \frac{BqY}{2u} = \frac{BqY}{2} \sqrt{\frac{m}{2qV}}$$

$$m^2 = \frac{B^2 q^2 Y^2 m}{8qV} \Rightarrow m = \frac{B^2 q Y^2}{8V}$$

$$m = \frac{(8 \times 10^4)^2 \times 1.6022 \times 10^{-19} \times (1.6254)^2}{8 \times 1 \times 10^3}$$


$$m = \frac{8 \times 8 \times 10^8 \times 1.6022 \times 10^{-19} \times (1.6254)^2}{8 \times 10^3}$$

$$m = 8 \times 1.6022 \times (1.6254)^2 \times 10^{-14}$$

$$m = 33.86 \times 10^{-14}$$


$$m = 3.39 \times 10^{-13} \text{ kg} \quad \text{--- (2)}$$



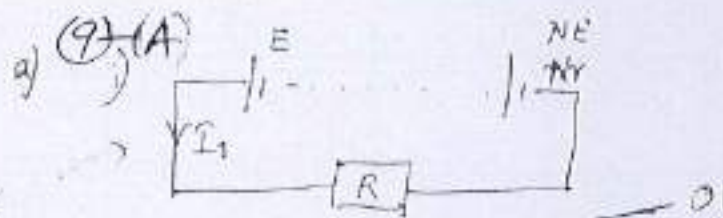

වනිතර E  
 $E_{NE} = NE$   
 $I_{NY} = NY$

$$I_1 = \frac{ME}{NY + R} = \frac{NE}{NY + r} = \frac{NE}{r[N+1]}$$

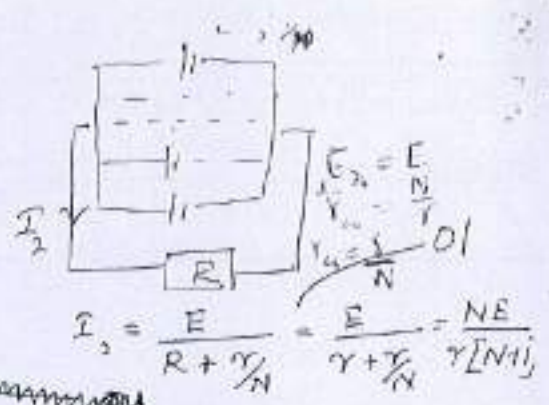

$$I_2 = \frac{E}{R + \frac{r}{N}} = \frac{E}{r + \frac{r}{N}} = \frac{NE}{r[N+1]}$$

$$I_1 = I_2 = \frac{NE}{r(N+1)}$$

ii) සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 සමුදායිත වූවකින් ඉවත් කළ විට  
 $R = NY$   
 $R = \frac{r}{N}$   
 සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 $\therefore$  සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 $\therefore$  සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා  
 සමුදායිත වූවකින් ඉවත් කළ විට වලක පවතින රඳවාගත්තය සඳහා

b) i) A ද්‍රව්‍ය + වේ. — 01


ii)  $24 - 12 = 4(R_c + 0.6 + 1) \quad \text{---} \quad 01$   
 $3V_2 = 4(R_c + 1.6)$   
 $R_c = 3 - 1.6$   
 $R_c = \underline{\underline{1.4 \Omega}} \quad \text{---} \quad 01$

iii) තෝද්‍රව්‍ය ඉවත් කළ විට.  
 $E = V - Ir \quad \text{---} \quad 01$   
 $12 = V_1 - 4 \times 0.6$   
 $V_1 = 12 + 2.4 = \underline{\underline{14.4V}} \quad \text{---} \quad 01$

ද්‍රව්‍ය ඉවත් කළ විට.  
 $24 = V_2 + 4 \times 1 \quad \text{---} \quad 01$   
 $V_2 = 24 - 4$   
 $V_2 = \underline{\underline{20V}} \quad \text{---} \quad 01$

ද්‍රව්‍ය ඉවත් කළ විට  
 $V_R = IR$   
 $= 4 \times 1.4$   
 $= 5.6V$   
 $V_2 = 14.4 + 5.6$   
 $= \underline{\underline{20.0V}}$

(c)  $21\Omega$  හරහා ගමන් කරන  $I_1$  ගණනය කරන්න.

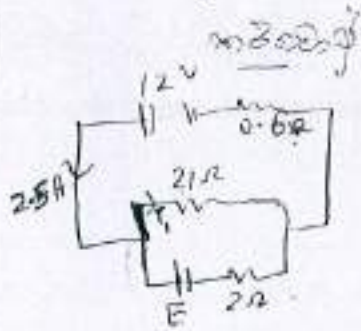

12 = 2.5 \times 0.6 + 21I\_1 \quad \text{--- 01}

21I\_1 = 12 - 1.50 = 10.5

I\_1 = \frac{10.5}{21} = 0.5A

2Ω හරහා ගමන් කරන ධාරාව = 2.5 - 0.5

= 2A \quad \text{--- 01}


(ii) ගණනය කරන්න

12 - E = 2.5 \times 0.6 + 2 \times 2 \quad \text{--- 01}

V = E + I\_c R\_c + I\_r R\_r \quad 12 - E = 1.5 + 4

12 = E + (2 \times 2) + (2.5 \times 0.6) \quad E = 12 - 5.5

= 6.5V \quad \text{--- 01}

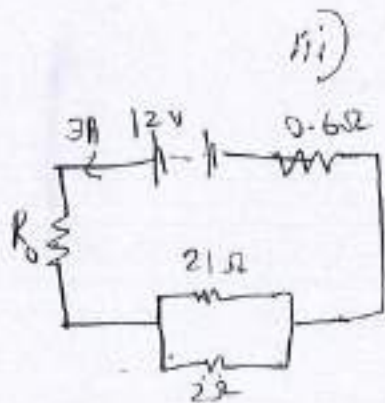

ගණනය කරන්න

12 - 4 = 2 (R\_0 + \frac{21 \times 2}{23}) + 0.6

\left( \frac{1}{21} + \frac{1}{2} = \frac{1}{R\_{eq}} = \frac{23}{21 \times 2} \right)

R\_{eq} = \frac{21 \times 2}{23}

R\_0 = 4 - \frac{4.2 + 0.6}{23} = \frac{92 - 4.8}{23} = \frac{87.2}{23}

R\_0 = 3.79\Omega \quad \text{--- 01}

4 = R\_0 + \frac{4.2 + 0.6}{23}

R = \frac{V}{I}

= \frac{12V}{3A}

R\_{eq} = 4\Omega

R\_0 = 4 - \frac{55.8}{23} = \frac{92 - 55.8}{23} = \frac{36.2}{23}

R\_0 = 1.574\Omega \quad \text{--- 01}

QB

(a)

	$c_1$	$c_2$	$c_3$	$B_1$	$B_2$
$0 < V < 0.25$	0	0	0	0	0
$0.25 < V < 0.5$	1	0	0	0	1
$0.5 < V < 0.75$	1	1	0	1	1
$0.75 < V < 1$	1	1	1	1	1


If all correct → 02  
 If two correct → 01

(ii)

$$B_0 = c_1 \bar{c}_2 \bar{c}_3 + c_2 c_3 \rightarrow 01$$

$$= c_1 (\bar{c}_2 \bar{c}_3 + c_2 c_3)$$

$$B_1 = c_1 c_2 \rightarrow 01$$

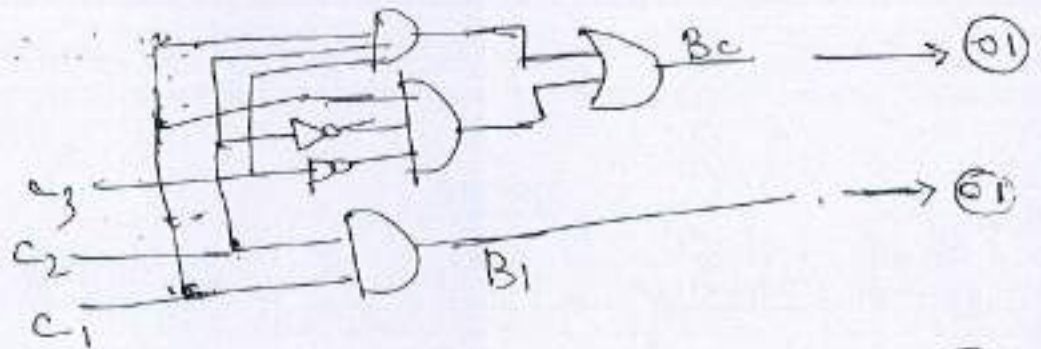

(b)

(i)

$$i_1 + i_2 = i_f \rightarrow 01$$

$$\frac{V_1}{R_1} + \frac{V_2}{R_2} = \frac{-V_{out}}{R_F}$$

$$V_{out} = -R_F \left( \frac{V_1}{R_1} + \frac{V_2}{R_2} \right) \rightarrow 01$$

(ii)

$$V_{out} = -(V_1 + V_2) \rightarrow 01$$


(c) (1) 
$$V_{out} = -R \left( \frac{V_1}{20R} + \frac{V_2}{10R} \right) \rightarrow (01)$$

$$= - \left( \frac{V_1}{10} + \frac{V_2}{10} \right)$$

Time	ADC A <sub>1</sub> A <sub>0</sub>	DAE (V)
0	0 0	0
1	0 1	-0.25
2	1 0	-0.50 V
3	1 1	-0.75
4	1 0	-0.50
5	1 1	-0.75
6	0 1	-0.25
7	0 0	0

If all correct  $\rightarrow (02)$

If  $\neq$  or above  $\rightarrow (01)$

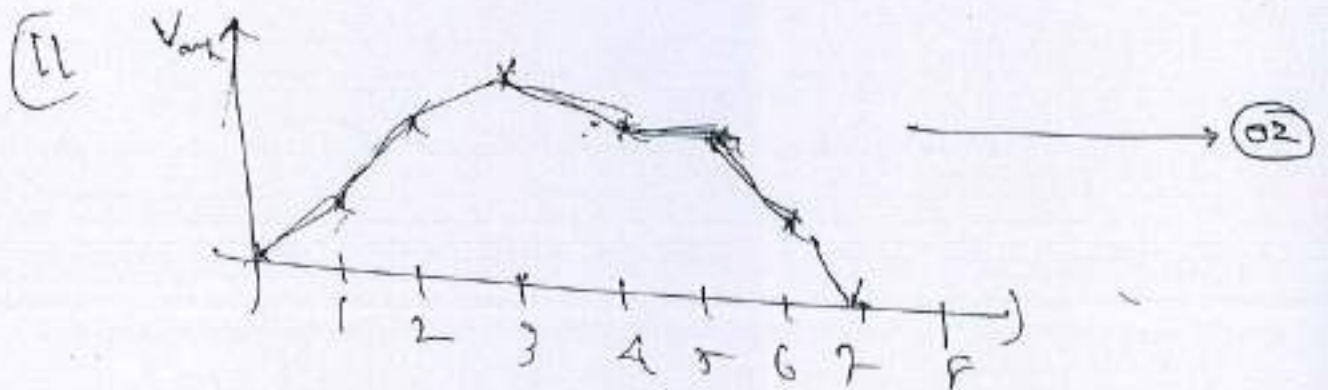

- (c) 1. computers can process only digital signals
2. noise signals (disturbance) do not affect the original signal

Any correct reaction  $\rightarrow (01)$

10 A

वैद्युत धारा

(i) एक चालक तार में - इस तार की लंबाई 1m है  
इस तार में एक चालक तार है जो 1°C पर तार में प्रवाहित  
होता है तार की लंबाई बढ़ेगी और तार में प्रवाहित  
धारा बढ़ेगी। इस तार में प्रवाहित धारा 15 A  
होती है।

(ii) I  $\Delta \phi = \Delta U + \Delta W$  — (01)

0 =  $\Delta U + \Delta W$

ऊर्जा संरक्षण का प्रयोग

उस  $\Delta W = 0$

$\Delta U = (-) \Delta W$

$\Delta W (-) \Delta W$  का अर्थ है ऊर्जा का प्रवाह है।  
इस  $\Delta U > 0$  है।

(01)  $u > 0$  तब  $\uparrow$  ← (01)

II  $\frac{dQ}{dt} = KA \frac{d\theta}{dx}$  — (01)

$= 2 \times 6.25 \times 10^{-2} \left[ \frac{180 - 80}{0.5 \times 10^{-2}} \right]$

$= 2500 \text{ W}$  — (01)

III  $\frac{dQ}{dt} = m c \frac{d\theta}{dt}$  — (01)

$2500 = \frac{m}{dt} \times 4 \times 10^3 \times [80 - 30]$



$\frac{m}{dt} = \frac{1}{8 \times 10^{-2}} = 1.25 \times 10^{-2} \text{ kg s}^{-1}$

(02)  $\uparrow$   
धारा बढ़ेगी



10-B

- (i) ප්‍රකාශ විද්‍යුත් දෘවිතාවය (07)
- (ii) දේහයේ සාක්‍ෂිතාවය (01)
- (iii)

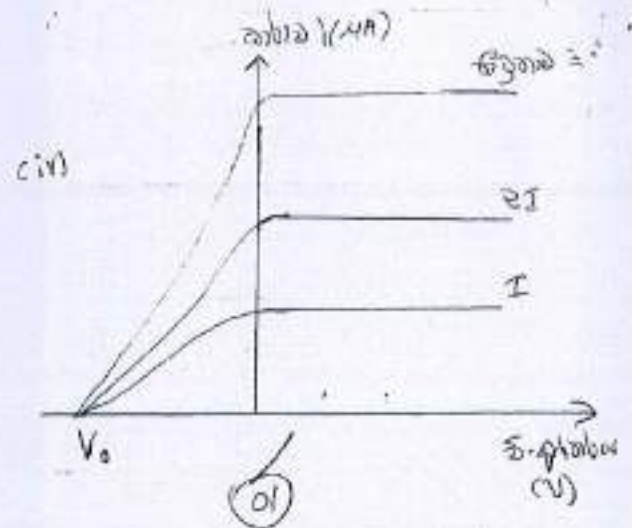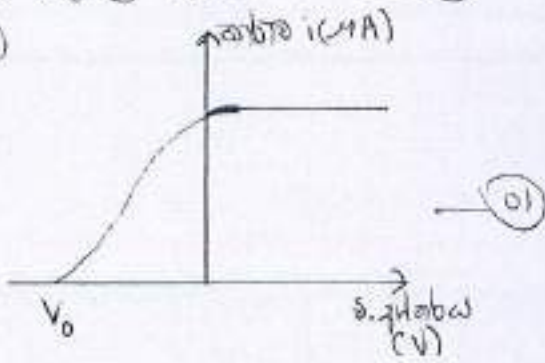

(v) ලෝහ සන්නිවේදන ප්‍රකාශ මූලෝපදේශනයක් මුහුණත් කරමින් දෘවිතාවය දැක්වූ චරිතයක්.

(vi)  $hf = \phi + \frac{1}{2}mv^2$  (01)

$hf$  - අවම ඊරණශක්තියක් හැඳින්වේ  
 $\phi$  - කාර්ය ශ්‍රිතය

$\frac{1}{2}mv^2$  - ප්‍රකාශ  $e$  නි අඟු දෘවිතව නැගෙන හැකියාව.

(vii) (a)  $hf = \phi + \frac{1}{2}mv^2$

$\frac{1}{2}mv^2 = k_{max} = hf - \phi$

$k_{max} = eV_0$

$eV_0 = hf - \phi$

$V_0 = \frac{hf}{e} - \frac{\phi}{e}$  (01)

(b)  $V_0 = \frac{h}{e} f - \frac{\phi}{e}$


$\uparrow \quad \uparrow \quad \uparrow \quad \uparrow$   
 $y = mx - c$

(c)  $m = \frac{h}{e}$

$h = me$  (01)

$c = \frac{\phi}{e}$

$\phi = ec$  (01)

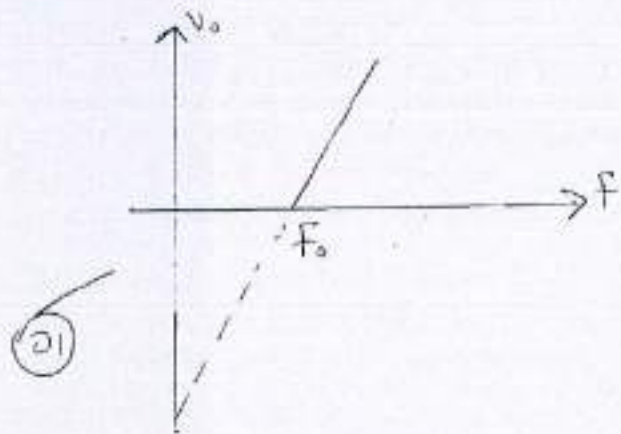

$$(vii) (a) \phi = hf_0 \quad \text{--- (1)}$$

$$2.3 \times 1.6 \times 10^{-19} = 6.6 \times 10^{-34} \times f_0$$

$$f_0 = \frac{2.3 \times 1.6 \times 10^{-19}}{6.6 \times 10^{-34}}$$

$$f_0 = \underline{5.58 \times 10^{14} \text{ Hz}} \quad \text{--- (2)}$$

$$(b) hf = \phi + \frac{1}{2}mv^2$$

$$\frac{hc}{\lambda} = \phi + \frac{1}{2}mv^2$$

$$\frac{1}{2}mv^2 = \frac{hc}{\lambda} - \phi$$

$$\frac{1}{2}mv^2 = \frac{6.6 \times 10^{-34} \times 3 \times 10^8}{4.5 \times 10^{-7}} - 2.3 \times 1.6 \times 10^{-19} \quad \text{--- (3)}$$

$$\frac{1}{2}mv^2 = 4.4 \times 10^{-19} - 3.68 \times 10^{-19} = 0.72 \times 10^{-19}$$

$$v^2 = \frac{2 \times 0.72 \times 10^{-19}}{9.1 \times 10^{-31}} = \frac{2 \times 0.72 \times 10^{12}}{9.1}$$

$$v = \sqrt{\frac{2 \times 0.72 \times 10^{12}}{9.1}} = 10^6 \times 0.40$$

$$v = \underline{4 \times 10^5 \text{ ms}^{-1}} \quad \text{--- (4)}$$

$$(c) eV_0 = \frac{1}{2}mv^2$$

$$V_0 = \frac{0.72 \times 10^{-19}}{1.6 \times 10^{-19}}$$

$$V_0 = \underline{0.45 \text{ V}} \quad \text{--- (5)}$$

15